


GR-FL-200WR Led Floodlight



Light distribution Curve

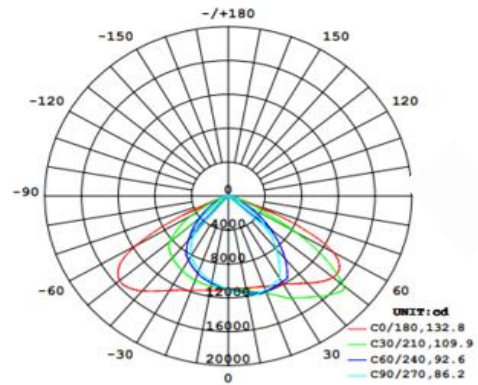

Description & Feature

This flood light fixture is made of high quality aluminum and PC lens cover, and it delivers a superior LED alternative that's up to 60% more energy efficient than the conventional HPS, Metal halide floodlight fitting. It is widely used for squares, construction sites, airports, stadium fields etc.

Its lifetime can be up to 10 years. The other extra function such as dimming/ photocell also can be available.

Application



Specification

Model	GR-FL-200WR
Dimension(mm)	315.3*454.3*75mm
Surge protection	6KV(10KV 20KV available)
Power	200W±5% (240W Max available)
LED Chips brand	Philips/Osram/Bridgelux SMD3030 288pcs
Lumens	22000-28000lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Meanwell/DONE/Philips options
Input voltage	100-240VAC / 220-240VAC 50/60Hz
Power factor	>0.95
CRI	>80
SDCM	<5
Working life	>50000Hrs
Efficiency	>90%
Materials	Die-cast aluminum+PC
Beam angle	30°/60°/90°/70°*140°
THD	<10%
IP Grade	IP65 waterproof
Dimmable	No. but it is ok to do Triac/0-10V/DALI Dimming if needed
Working temperature	-30°C~+55°C
Package	600*390*135mm/pcs/CTN
Standard	CE LVD EMC RoHs
Warranty	3/5Years options