


GR-CD-24WH IP65 flush mount ceiling light



Dimension

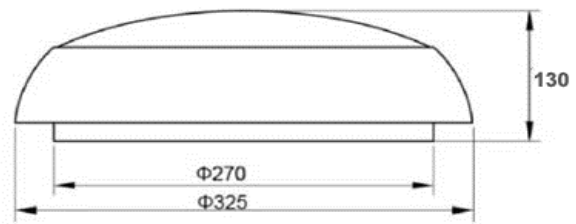


Unit:mm

Description&Feature

This flush mount ceiling light is made of PC bottom and PC Cover, whole body is white finished. The structure is improved by adding extra waterproof rubber ring, which will be up to be IP65 Waterproof grade, widely used for corridors, toilets,bathroom, kitchen room where is moistures or outdoor places.

Its lifetime can be up to 50000Hrs at least
The other extra function such as triac dimmable/
Emergency backup(30% power with 1hours/2hours duration)/ Radar sensor.

Light Distribution

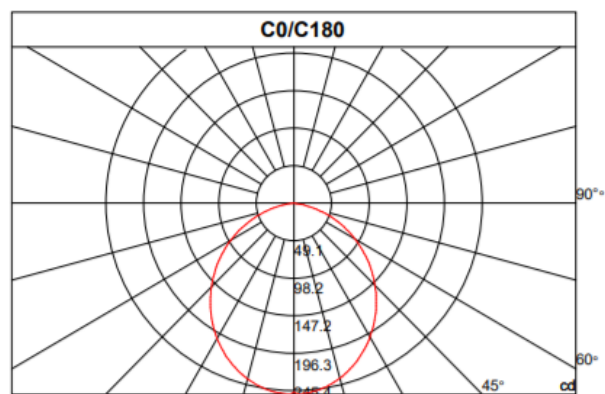

Specification

Order Model	GR-CD-24WH
Dimension(mm)	φ325XH130mm
Outcut(mm)	/
Wattage	24W±5%
LED Chips brand	Epistar/Osram SMD LED Chips
Lumens	2000-2400lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Input voltage	100-240VAC 50/60Hz/220-240VAC
Driver	Included top quality constant current driver
Power factor	>0.5 or >0.9
CRI	>80
SDCM	<5
Working life	>50000Hrs
Efficiency	>87%
Materials	Plastic bottom+PC Cover,Anti-yellowing,White frame finished
Beam angle	120°
Installation	Surface mounted
IP Grade	IP65 Waterproof
Option	Triac dimmable/ Emergency backup
Working temperature	-25°C~+50°C
Storage temperature	-30°C~+55°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years