


# GR-DLG-15WP\*2 Twin Square Downlight



## Dimension



195\*95

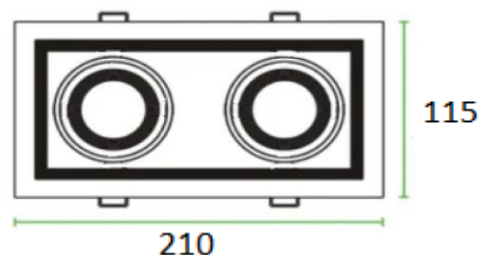


Unit:mm

## Description&Feature

LED Square downlight also called spot lights with narrow beam angle. It can be 360° rotation and 30° adjustable beam angle. Top quality materials such as Philips/DONE/LiFud driver and CREE/Bridgelux COB Chips will make sure the longest lifetime. Widely used for high quality commercial lighting projects.

The other extra function such as dimming/emergency backup/Zigbee smart control also can be available.

## Light Distribution Curve

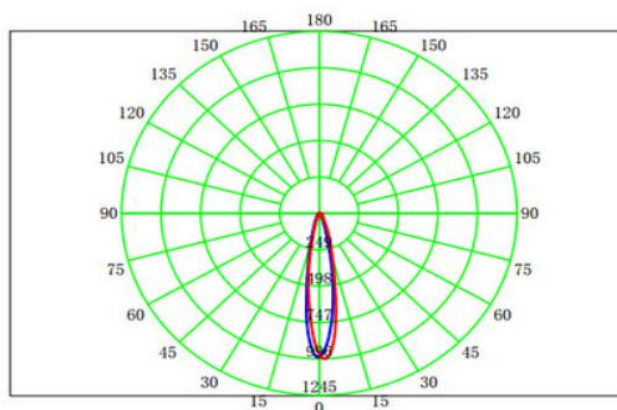

## Specification

|                     |  |
|---------------------|--|
| Order Model         | GR-DLG-15WP*2  |
| Dimension(mm)       | L210*W115mm  |
| Outcut              | Φ195*95mm  |
| Power               | 30W±5%   |
| LED Chips brand     | CREE/CITIZEN/Bridgelux COB chips   |
| Lumens              | 2600-3000lm  |
| Color temperature   | 3000K/4000K-4500K/6000K-6500K  |
| Driver              | Philips/Osram/DONE/Eagerise/Boke/LiFud etc Top brand                               |
| Input voltage       | 100-240VAC / 220-240VAC 50/60Hz  |
| Power factor        | >0.5 or >0.9   |
| CRI                 | >90  |
| SDCM                | <5 ( <3 available)   |
| Working life        | >50000Hrs  |
| Efficiency          | >87%   |
| Materials           | Die-cast aluminum,White finished   |
| Beam angle          | 24°  |
| IP Grade            | IP22 indoor use only   |
| Emergency kits      | No. but it is ok to do emergency backup for 30% power with 1hrs 2hrs 3hrs duration |
| Dimmable            | No. but it is ok to do Triac/0-10V/DALI/Zigbee smart control if needed             |
| Working temperature | -25°C~+55°C  |
| Storage temperature | -30°C~+60°C  |
| Standard            | CE LVD EMC RoHs  |
| Warranty            | 2/3/5Years   |