

GR-DLG-20WF*2 Pull Out Downlight



Application




Description & Feature

This is pull out downlight, recessed installation. It can be as a spotlights and track spotlights for accent lighting. 360° rotation available. Very modern and style in design. Top quality materials-aluminum body and famous brand driver will make sure the light will be longest lifetime. Suitable for commercial projects.

Its lifetime can be up to be 50000Hrs. The other extra function such as dimming/ Zigbee smart control also can be available.

Light Distribution Curve

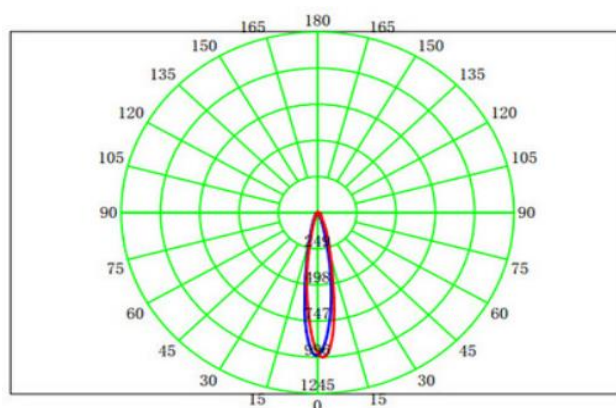

Specification

Order Model	GR-DLG-20WF*2
Dimension(mm)	L250*W140mm
Outcut	L230*W120mm
Power	40W±5%
LED Chips brand	Osram/CREE/CITIZEN/Bridgelux COB Led chips
Lumens	3500-4000lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Philips/Osram/DONE/Eagerise/Boke/LiFud etc Top brand
Input voltage	100-240VAC / 220-240VAC 50/60Hz
Power factor	>0.5 or >0.9 if needed
CRI	>92
SDCM	<5 (<3 available)
Working life	>50000Hrs
Efficiency	>87%
Materials	Die-cast aluminum, White finished
Beam angle	24°
IP Grade	IP22 indoor use only
Installation	Recessed
Dimmable	No. but it is ok to do Triac/0-10V/DALI Dimming if needed
Working temperature	-30°C~+55°C
Storage temperature	-35°C~+60°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years