


# GR-DLG-7WE\*3 Triple Downlight



## Application




## Description & Feature

This square Downlight adopt deep anti-glare design, it is ok to be rotation 25°, and consists of die-cast aluminum housing+ CREE/CITIZEN/Bridgelux chips. The housing can be black/white finished. It is widely used for residential area or commercial lighting.

The other extra function such as dimming/ emergency backup/Zigbee smart control also can be available.

## Light Distribution Curve

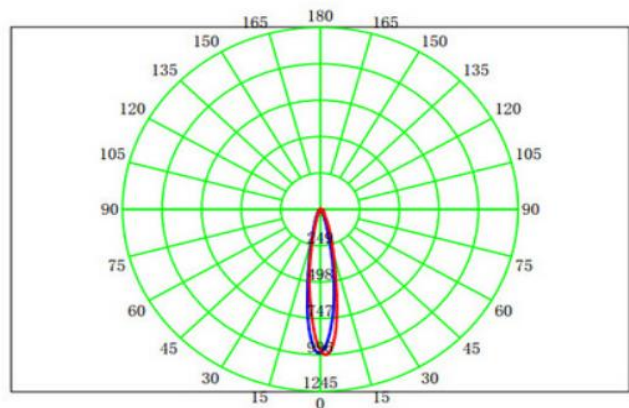

## Specification

Order Model	GR-DLG-7WE*3
Dimension(mm)	L330*W130mm
Outcut	L305*W105mm
Power	21W±5%
LED Chips brand	CREE/CITIZEN/Bridgelux COB chips
Lumens	1800-2100lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Philips/Osram/DONE/Eagerise/Boke/LiFud etc Top brand
Input voltage	100-240VAC / 220-240VAC 50/60Hz
Power factor	>0.5 or >0.9 if needed
CRI	>90
SDCM	<5 ( <3 available)
Working life	>50000Hrs
Efficiency	>88%
Materials	Die-cast aluminum, White finished
Beam angle	24°/15°/38°
IP Grade	IP22 indoor use only
Emergency kits	No. but it is ok to do emergency backup for 30% power with 1hrs 2hrs 3hrs duration
Dimmable	No. but it is ok to do Triac/0-10V/DALI/Zigbee smart control if needed
Working temperature	-25°C~+55°C
Storage temperature	-30°C~+60°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years