GR-PL3030-18W Panel Light

EuroLight™ GRNLED

IP22

Dimension

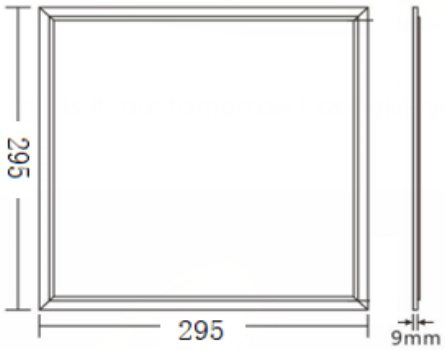

Unit:mm

Description&Feature

This is edge-lit LED panel with 18W LED module (SMD) for high light output,adding Anti-UV light guide plate to avoid any yellow-changes. Includes LED driver. Square, slimline profile for use in T-bar ceilings.What's more, the different installations-recessed,surface,suspension are optional.It is the perfect choice for commercial lighting projects.

Its lifetime can be up to 5years.

The other extra function such as dimming/ emergency backup/Smart APP Control/Remote control/3CT also can be available.

Light Distribution Curve

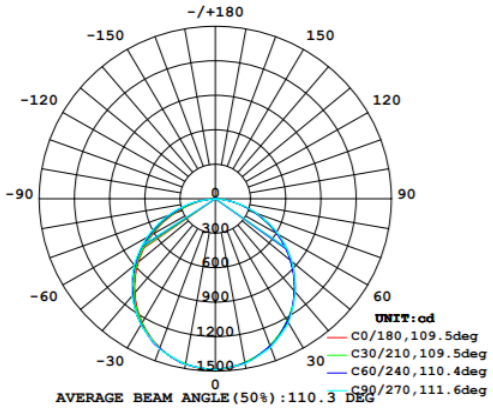

Specification

Order Model	GR-PL3030-18W
Dimension(mm)	295*295*9mm
Power	18W±5%
Input voltage	100-240VAC / 220-240VAC 50/60Hz
LED Chips brand	Philips/Epistar SMD Led chips
Lumens	1700-1800lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Included, free flicker
UGR	<20
Power factor	>0.9
CRI	>80
SDCM	<5
Working life	>50000Hrs
Efficiency	>88%
Materials	Die-cast aluminum+LGP+PS Diffuser+metal back cover,White/Silver finished
Beam angle	110-120°
Installation	Recessed(Surface/suspension accessories don't be included)
IP Grade	IP22 indoor use only
Warranty	2/3/5Years
Working temperature	-30°C～+50°C
Emergency kits	No. but it is ok to do emergency backup for 30% power with 1hrs 2hrs 3hrs duration
Standard	CE LVD EMC RoHs
Dimmable	No. but it is ok to do Triac/0-10V/DALI Dimming if needed