



# GR-PL6060-40W 4ftx4ft Panel Light

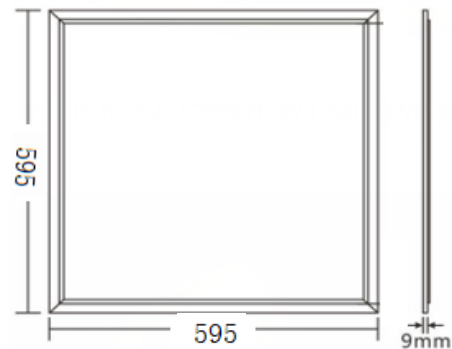

## Dimension

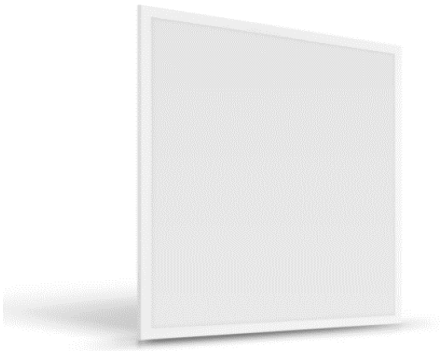


Unit:mm

## Description&Feature

This is edge-lit LED panel with 40W LED module (SMD) for high light output, adding Anti-UV light guide plate to avoid any yellow-changes. Includes LED driver. Square, slimline profile for use in T-bar ceilings. What's more, the different installations-recessed, surface, suspension are optional. It is the perfect choice for commercial lighting projects.

The other extra function such as dimming/ emergency backup/Smart APP Control/Remote control/3CT also can be available.

## Light Distribution Curve

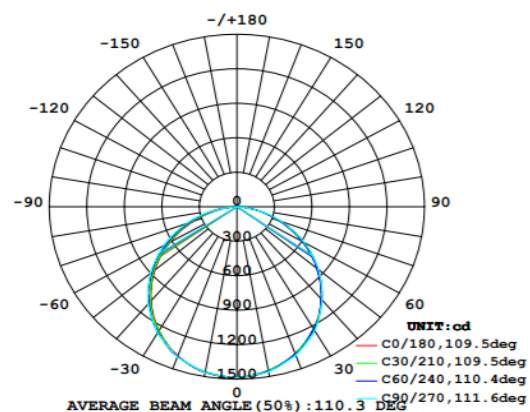

## Specification

Order Model	GR-PL6060-40W
Dimension(mm)	595*595*9mm
Power	40W±5%
Input voltage	100-240VAC / 220-240VAC 50/60Hz
LED Chips brand	Philips/Epistar SMD Led chips
Lumens	4000-4200lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Included
Free flicker	Yes
Power factor	>0.9
CRI	>80
SDCM	<5 ( <3 available)
Working life	>50000Hrs
Efficiency	>88%
Materials	Die-cast aluminum+LGP+PS Diffuser+metal back cover, White/Silver finished
Beam angle	110-120°
Installation	Recessed(Surface/suspension accessories don't be included)
IP Grade	IP22 indoor use only
Warranty	2/3/5Years
Working temperature	-30°C~+50°C
Emergency kits	No. but it is ok to do emergency backup for 30% power with 1hrs 2hrs 3hrs duration
Standard	CE LVD EMC RoHs
Dimmable	No. but it is ok to do Triac/0-10V/DALI Dimming if needed