


GR-BD-2*15WA Up Down Wall Light



Dimension

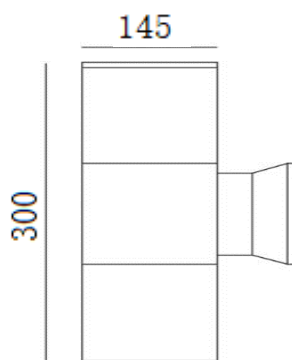


Unit:mm

Description&Feature

This is outdoor wall mounted, made of die-cast aluminum body, toughed glass cover, COB led chips. Up down lighting. Grey/Black finished options. CRI90 LED Chips and top quality isolated driver, it is very suitable for commercial projects for façade lighting.

The input voltage 100-240VAC 50/60Hz as standard, but AC/DC12V 24V can be customized as well. What is more, dimmable, motion sensor also can be available if needed.

Light Distribution

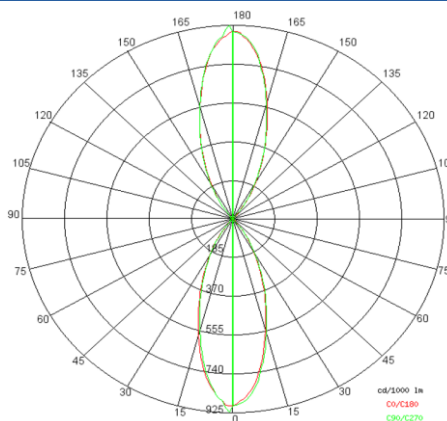

Specification

Order Model	GR-BD-2*15WA
Diameter(mm)	Φ145*H300mm
Outcut	/
Power	30W±5%
LED Chips brand	Bridgelux Chips
Lumens	2700-3000lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Isolated driver included
Input voltage	100-240VAC / 220-240VAC 50/60Hz
Power factor	>0.6
CRI	>90
SDCM	<5
Working life	>50000Hrs
Efficiency	>88%
Materials	Die-cast aluminum body+Toughed glass cover. Grey /Black finished options
Beam angle	30/60°
IK Rating	IK07
IP Grade	IP66 waterproof
Dimmable	No.(It is ok to do triac/0-10v/dali if needed)
Working temperature	-25°C~+60°C
Storage temperature	-30°C~+65°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years options