


# GR-BD-2\*20WA Up Down Wall Light



## Dimension

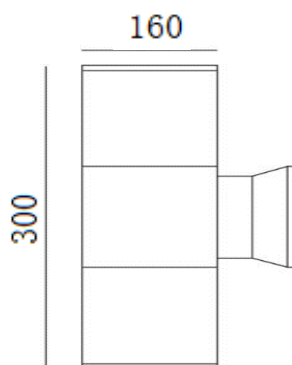


Unit:mm

## Description&Feature

This is outdoor wall mounted, made of die-cast aluminum body, toughed glass cover, COB led chips. Up down lighting. Grey/Black finished options. CRI90 LED Chips and top quality isolated driver, it is very suitable for commercial projects for façade lighting.

The input voltage 100-240VAC 50/60Hz as standard, but AC/DC12V 24V can be customized as well. What is more, dimmable, motion sensor also can be available if needed.

## Light Distribution

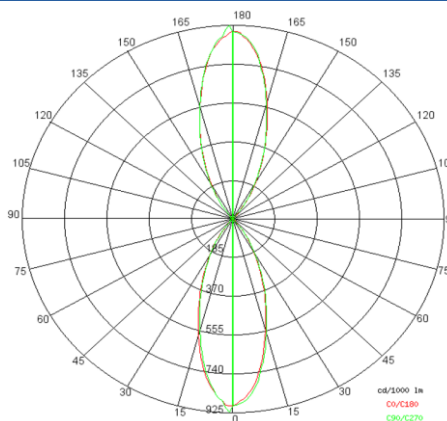

## Specification

|                     |  |
|---------------------|--|
| Order Model         | GR-BD-2*20WA   |
| Diameter(mm)        | Φ160*H300mm  |
| Outcut              | /  |
| Power               | 40W±5%   |
| LED Chips brand     | Bridgelux Chips  |
| Lumens              | 3600-4000lm  |
| Color temperature   | 3000K/4000K-4500K/6000K-6500K  |
| Driver              | Isolated driver included   |
| Input voltage       | 100-240VAC / 220-240VAC 50/60Hz  |
| Power factor        | >0.6   |
| CRI                 | >90  |
| SDCM                | <5   |
| Working life        | >50000Hrs  |
| Efficiency          | >88%   |
| Materials           | Die-cast aluminum body+Toughed glass cover. Grey /Black finished options |
| Beam angle          | 30/60°   |
| IK Rating           | IK07   |
| IP Grade            | IP66 waterproof  |
| Dimmable            | No.(It is ok to do triac/0-10v/dali if needed)                           |
| Working temperature | -25°C~+60°C  |
| Storage temperature | -30°C~+65°C  |
| Standard            | CE LVD EMC RoHs  |
| Warranty            | 2/3/5Years options   |