GR-BD-2*5WF-R Up Down Wall Light

EuroLight™ GRNLED

IP66

Dimension

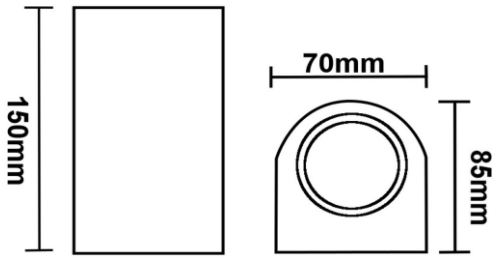

Description&Feature

This is outdoor wall mounted, made of die-cast aluminum body,toughed glass cover, led chips. Up down lighting. Grey/Black finished options. CRI90 LED Chips and top quality isolated driver, it is very suitable for commercail projects for façade lighting. The standard version is with COB led chips, but also can be GU10 LED bulb optional.

The input voltage 100-240VAC 50/60Hz as standard, but AC/DC12V 24V can be customized as well. What is more, dimmable,motion sensor also can be available if needed.

Application

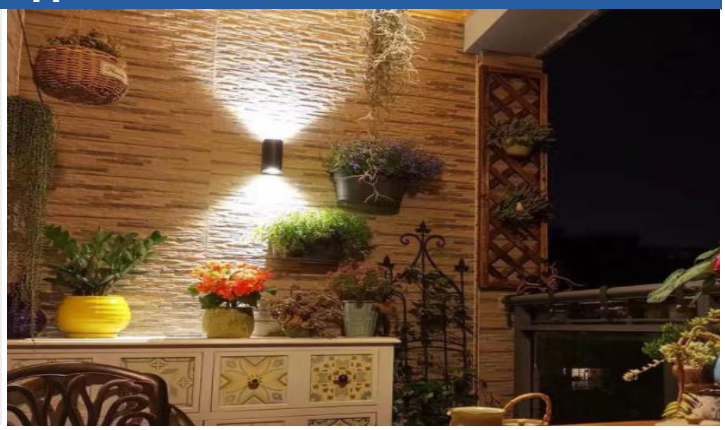

Specification

Order Model	GR-BD-2*5WF-R
Diameter(mm)	L85*W70*H150mm
Outcut	/
Power	10W±5%
LED Chips brand	Bridgelux Chips
Lumens	900-1000lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Isolated driver included
Input voltage	100-240VAC / 220-240VAC 50/60Hz
Power factor	>0.6
CRI	>90
SDCM	<5
Working life	>50000Hrs
Efficiency	>88%
Materials	Die-cast aluminum body+Toughed glass cover. Grey /Black finished options
Beam angle	30/60°
IK Rating	IK07
IP Grade	IP66 waterproof
Dimmable	No.(It is ok to do triac/0-10v/dali if needed)
Working temperature	-25°C～+60°C
Storage temperature	-30°C～+65°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years options