


GR-BD-3WL-S Recessed Wall Light

EuroLight™ GRNLED



Dimension

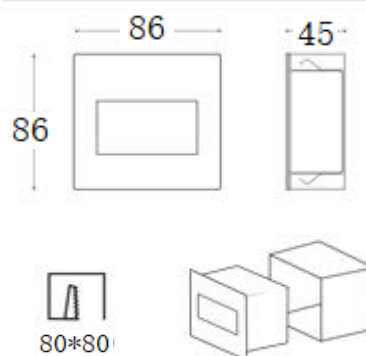

Unit:mm

Description&Feature

This is outdoor recessed wall mounted light, made of die-cast aluminum body, led chips. Grey/Black/White finished options. The driver is isolated and built-in. The waterproof level up to IP65, it is ok to used outdoor building, steps, plazas or indoor place.

The input voltage 100-240VAC 50/60Hz as standard, but AC/DC12V 24V can be customized as well. What is more, dimmable, motion sensor also can be available if needed.

Application



Specification

Order Model	GR-BD-3WL-S
Diameter(mm)	L86*W86*H45mm
Outcut	L80*W80*H51mm
Power	3W±5%
LED Chips brand	Bridgelux Chips
Lumens	270-300lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Isolated driver included
Input voltage	100-240VAC / 220-240VAC 50/60Hz
Power factor	>0.5
CRI	>80
SDCM	<5
Working life	>50000Hrs
Efficiency	>88%
Materials	Die-cast aluminum body. Grey /Black finished options
Beam angle	120°
IK Rating	IK07
IP Grade	IP65 waterproof
Dimmable	No.(It is ok to do triac/0-10v/dali if needed)
Working temperature	-25°C~+60°C
Storage temperature	-30°C~+65°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years options