


# GR-GL-1WB42 Inground Light



## Dimension

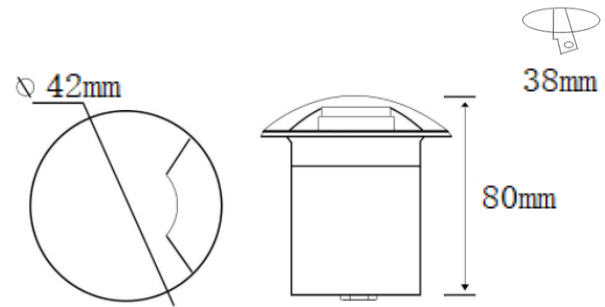

## Description & Feature

This is recessed led inground light, made of stainless steel body, ABS embadded parts, and toughed glass. Waterproof level up to IP67 Max. There are 1 side lighting, double sides or forth side lighting optional. Light colors are white, warm white, Red, Blue, Green optional. Lifetime up to 50000Hrs. Good choice to do landscape lighting.

The input voltage 100-240VAC 50/60Hz as standard, but AC/DC12V 24V can be customized as well. What is more, dimmable, DMX512 control also can be available if needed.

## Application



## Specification

Order Model	GR-GL-1WB42
Dimension(mm)	Φ42*H80mm
Outcut	Φ38mm
Power	1W±5%
LED Chips brand	Epistar/Bridgelux Chips
Lumens	90-100lm
Color temperature	3000K/4000K-4500K/6000K-6500K/Red/Blue/Green
Driver	Isolated driver included
Input voltage	100-240VAC / 220-240VAC 50/60Hz
Power factor	>0.5
CRI	>80
SDCM	<5
Working life	>50000Hrs
Efficiency	>88%
Materials	Stainess steel body+Toughed glass cover
Beam angle	30°
IK Rating	IK08
IP Grade	IP67 waterproof
Dimmable	No.(It is ok to do triac/0-10v/dali if needed)
Working temperature	-25°C~+60°C
Storage temperature	-30°C~+65°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years options