

GR-GL-1WE Low voltage Inground Light



Dimension




Description & Feature

This is recessed led inground light, made of stainless steel body, ABS embadded parts, and toughed glass. Waterproof level up to IP67 Max. There are 1 side lighting, double sides or forth side lighting optional. Light colors are white, warm white, Red, Blue, Green optional. Lifetime up to 50000Hrs. Good choice to do landscape lighting.

The input voltage DC12V/24V as standard, but 100-240VAC can be optional as well. What is more, dimmable, DMX512 control also can be available if needed.

Application

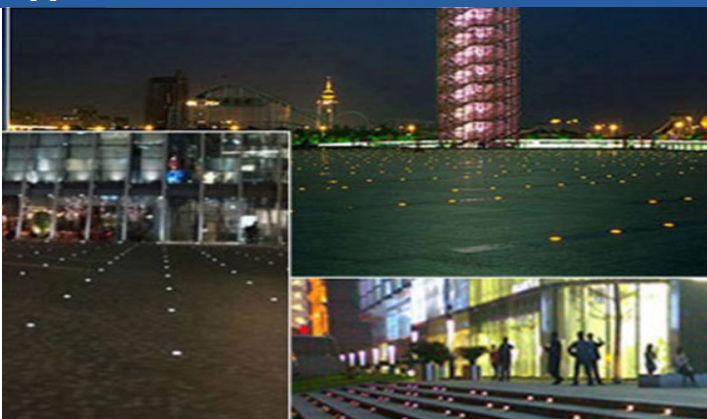

Specification

Order Model	GR-GL-1WE42/ GR-GL-1WE52 / GR-GL-1WE62
Dimension(mm)	Φ42*H70mm / Φ52*H83mm / Φ62*H89mm
Outcut	Φ38mm / Φ48mm / Φ58mm
Power	1W±5%
LED Chips brand	Epistar/Bridgelux Chips
Lumens	90-100lm
Color temperature	3000K/4000K-4500K/6000K-6500K/Red/Blue/Green
Driver	Low voltage driver included
Input voltage	DC12V or DC24V
Power factor	>0.5
CRI	>80
SDCM	<5
Working life	>50000Hrs
Efficiency	>88%
Materials	Stainless steel body+Toughed glass cover
Beam angle	30°
IK Rating	IK08
IP Grade	IP67 waterproof
Dimmable	No.(It is ok to do triac/0-10v/dali if needed)
Working temperature	-25°C~+60°C
Storage temperature	-30°C~+65°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years options