


# GR-LS5035-1200 Recessed Linear Light EuroLight™ GRNLED



## Dimension

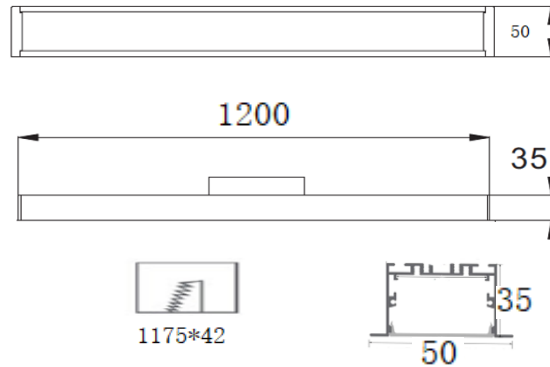

Unit:mm


## Description&Feature

This is rectangle linear light,with recessed installation structure, modern & stylish design, made of die-cast aluminum heat sink and PC cover, top quality led chips,driver. It including strong clips for recessed installation. Widely used for kitchen,offices, supermarkets etc. It is with external led constant current led driver, easy to do installation and maintenance.

Its lifetime can be up to 5years.

The other extra function such as PWM/0-10V/DALI Dimmable or emergency backup also can be available.

## Light Distribution Curve

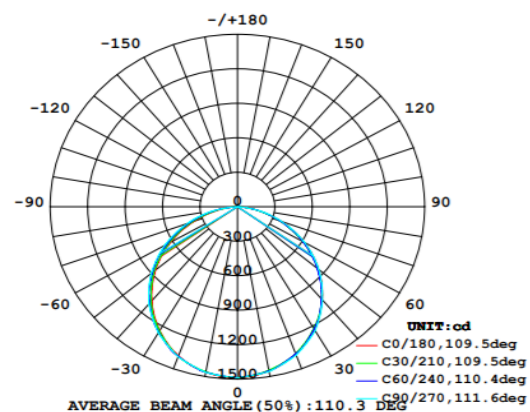

## Specification

Order Model	GR-LS5035-1200
Dimension(mm)	L1200*W50*H35mm
Cut out(mm)	L1175*W43*H70mm
Power	36Watt±5%
LED Chips brand	Philips/Epistar /Bridgelux SMD chips
Lumens	3600-3700lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Input voltage	100-240V/220-240VAC 50/60Hz
Driver	External driver included
Power factor	>0.9
CRI	>80
SDCM	<5
Working life	>50000Hrs
Efficiency	>89%
Materials	Die-cast aluminum+PC Cover, white/black/aluminum color finished
Beam angle	120°
IP Grade	IP22 indoor use only
Installation	Recessed
Options	Emergency backup /Triac/0-10V/DALI if needed
Working temperature	-30°C~+60°C
Storage temperature	-35°C~+65°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years