


GR-LS60-1200 Linear Pendant Light



Dimension

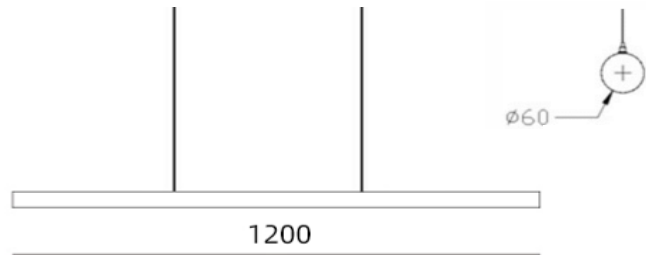

Unit:mm

Description&Feature

This is linear round pendant light, with larger beam angle 320°, modern & stylish design, made of die-cast aluminum heat sink and PC cover, top quality led chips, driver. It including steel ropes for hanging installation. Widely used for kitchen, offices, dining room etc. It is with external led constant current led driver, easy to do installation and maintenance.

Its lifetime can be up to 5years.
The other extra function such as PWM/0-10V/DALI Dimmable also can be available.

Application



Specification

Order Model	GR-LS60-1200
Dimension(mm)	L1200*D60mm
Power	36W±5%
Input voltage	100-240VAC / 220-240VAC 50/60Hz
LED Chips brand	Philips/Epistar /Bridgelux SMD chips
Lumens	3600-3700lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Included
THD	<20%
Power factor	>0.9
CRI	>80
SDCM	<5
Working life	>50000Hrs
Efficiency	>86%
Materials	Die-cast aluminum+PC Cover
Beam angle	320°
IP Grade	IP22 indoor use only
Hanging wire	Included 1meter-1.2meter long
Dimmable	No. but it is ok to do Triac/0-10V/DALI if needed
Working temperature	-30°C~+60°C
Storage temperature	-35°C~+65°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years