





Dimension

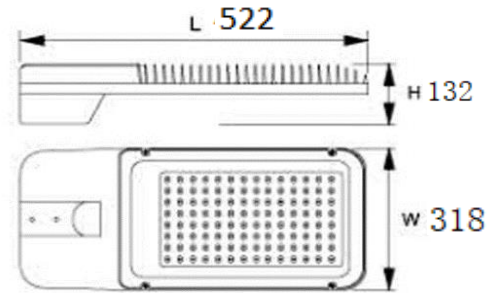


Description&Feature

This Street light is same as philips street light with latest tool-free design with Knob,without any screws for back cover,and switch-off devices available, delivers a superior LED alternative that's up to 60% more energy efficient than the conventional HPS,Metal halide road light retrofits. The driver and chips can be with philips brand. Top quality , the surge protection up to 6-20KV.

Its lifetime can be up to 10years. The other extra function such as dimming/ photocell also can be available.

Light Distribution Curve

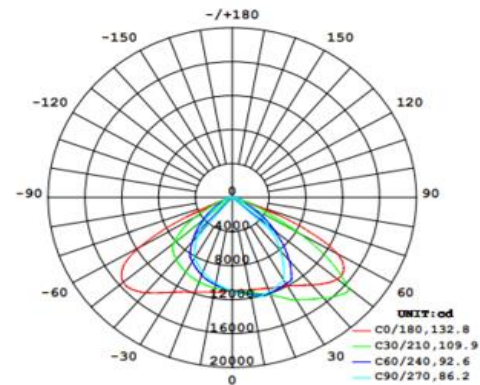

Specification

Order Model	GR-SL-200WY
Dimension(mm)	522*318*132mm
Pole diameter	φ60mm
Power	200W±5%
LED Chips brand	Philips/Osram/Bridgelux SMD3030
Lumens	20000-22000lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Isolated driver included(Meanwell/DONE/Philips options)
Input voltage	100-240VAC / 220-240VAC 50/60Hz
Power factor	>0.95
CRI	>70
SDCM	<5
Working life	>50000Hrs
Efficiency	>90%
Materials	Die-cast aluminum+lens+ glass cover
Beam angle	70*140°
THD	<15%
Surge protection	6KV(10KV 20KV Optional)
Dimmable	No. but it is ok to do Triac/0-10V/DALI Dimming if needed
Working temperature	-25°C~+55°C
Storage temperature	-30°C ~ +55°C
IP Grade	IP66 waterproof
Warranty	3/5Years options
Standard	CE LVD EMC RoHs