


# GR-DL-20WZ01 Surface Fold Downlight EuroLight™ GRNLED



## Dimension

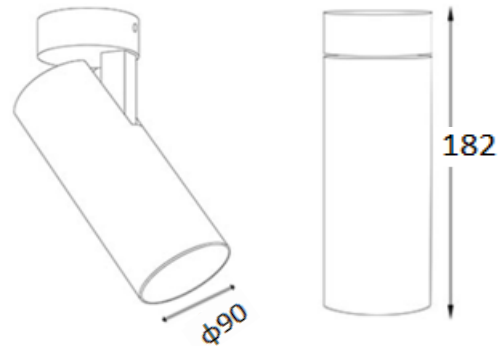


Unit:mm

## Description&Feature

This cylinder downlight is surface installation type, and with fold design, it can be adjustable direction as wall washer spotlights, and also can be as cylinder surface downlights. Widely used for commercial places such as clothes shop, supermarkets, or residential place lik kitchen, dinning room etc.

Its lifetime can be up to be 50000Hrs.  
The other extra function such as dimming/ Zigbee smart control also can be available.

## Light Distribution Curve

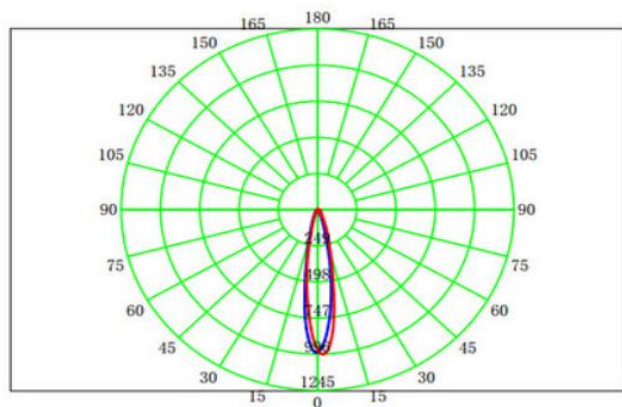

## Specification

Order Model	GR-DL-20WZ01
Dimension(mm)	$\phi 90 \times H182$ mm
Outcut	/
Power	20W $\pm$ 5%
LED Chips brand	Osram/CREE/CITIZEN/Bridgelux COB Led chips
Lumens	1800-2000lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Philips/Osram/DONE/Eagerise/Boke/LiFud etc Top brand
Input voltage	100-240VAC / 220-240VAC 50/60Hz
Power factor	>0.5 or >0.9 if needed
CRI	>92
SDCM	<5 ( <3 available)
Working life	>50000Hrs
Efficiency	>87%
Materials	Die-cast aluminum,Black/White finished
Beam angle	24°
IP Grade	IP22 indoor use only
Installation	Surface
Dimmable	No. but it is ok to do Triac/0-10V/DALI Dimming if needed
Working temperature	-30°C~+55°C
Storage temperature	-35°C~+60°C
Standard	CE LVD EMC RoHs
Warranty	2/3/5Years