


# GR-SSL-60WB Solar Street Light




## Description & Feature

This integrated solar street light is high quality solution, with LifePO4 12.8V battery, 18V Mono solar panel, PWM or MPPT Solar controller. The duration time is 3-5 raining days. It is available to do different joint for different installation. Widely used for governments projects.

Working model: Light with radar sensor, dusk to dawn. During night time, the light will be 100% brightness when there is any movement, but it will be only 30% brightness when there is no any movement.

## Light Distribution Curve

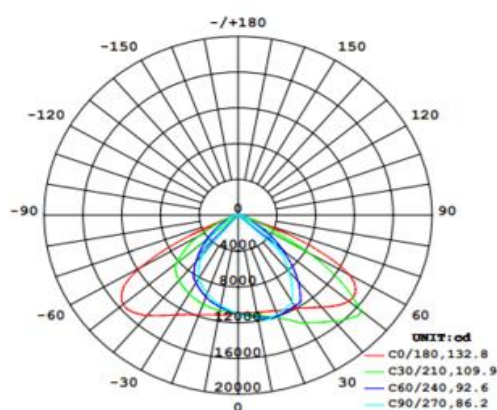

## Specification

Order Model	GR-SSL-60WB
Dimension(mm)	1190*385*180mm
Materials	Aluminum alloy
Power	Equalivant 60W
LED Chips brand	Bridgelux SMD3030 160PCS
Lumens	6600-7800lm
Color temperature	3000K/4000K-4500K/6000K-6500K
CRI	>80
Beam angle	70*140°
LifePO4 battery	12.8V 42AH
Solar Panel	Mono solar panel 18V 80W
Install Pole Diameter	60-65mm
Mounting height	7-9M
Installation Distance	20-30M
Solar charging time	6hours by bright sunling
Duration	<b>3-5raining days</b>
Motion sensor	Yes ( Radar sensor)
IP Grade	IP65 Waterproof
Remote controller	Yes (1pcs remote controller per order)
Working temperature	-25°C~+65°C
Working life	>50000Hrs
Standard	CE LVD EMC RoHs
Warranty	3Years