




Description & Feature

This is top quality triproof batten light fitting, made of PC bottom and PC frosted cover, avoiding any yellowing-change, it is very strong, IK08 level, and not easy to be broken, good waterproof performance, up to IP65. The surface mounted is standard version. It is the perfect choice to do high level projects.

Its lifetime can be up to 50000Hrs. The other extra function such as dimming/ / low voltage like DC12V/24V/ Emergency backup(30%power+ 2hrs/3hrs duration) also can be available.

Light distribution

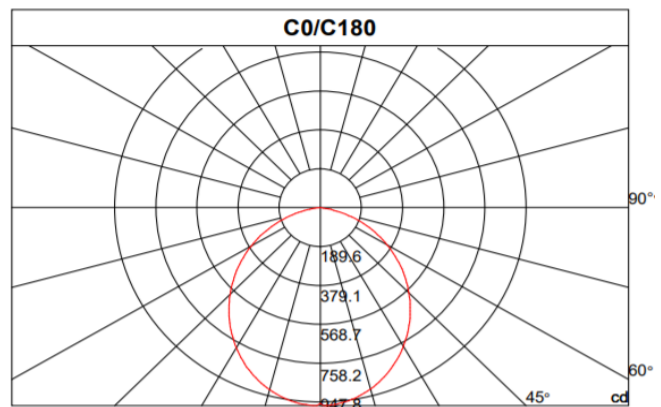

Specification

Order Model	GR-TPP-5F44WA
Dimension(mm)	L1530*W58*H53mm
Cut out	/
Power	44W±5%
LED Chips brand	Epistar/Osram SMD LED Chips
Lumens	4200-4500lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Top quality driver included
Input voltage	100-240VAC /220-240VAC 50/60Hz
Power factor	>0.9
CRI	>80
SDCM	<5
Working life	>50000Hrs
Efficiency	>89%
Materials	PC Bottom+PC Cover+ Aluminum heat
Beam angle	120°
Option	Dimmable/ Emergency back/ low voltage input options
IP Grade	IP65 waterproof
IK Rating	IK08
Working temperature	-25°C~+55°C
Storage temperature	-30°C~+60°C
Standard	CE LVD EMC RoHs
Warranty	2/3Years options