

GR-DF-1200A Slim Batten Light



Dimension




Description & Feature

This is economic batten light fitting, made of aluminum bottom and PC frosted cover, avoiding any yellowing-change, it is very strong, IK08 level, and not easy to be broken, good protection grade, up to IP44. The surface mounted is standard version. It is the perfect choice to do high level projects.

Its lifetime can be up to 30000Hrs. The other extra function such as dimming/ / low voltage like DC12V/24V/ also can be available.

Light distribution

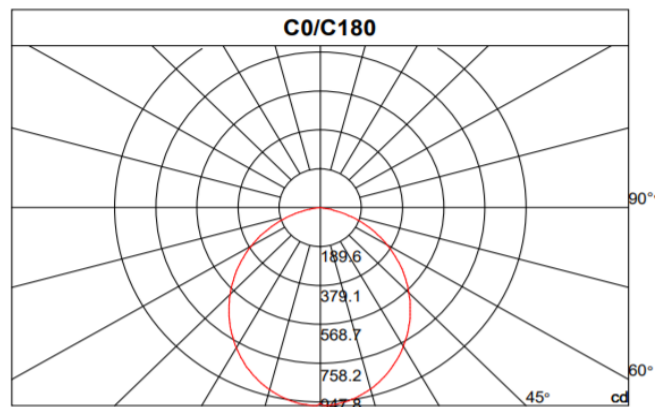

Specification

Order Model	GR-DF-1200A
Dimension(mm)	L1200*W75*H23mm
Cut out	/
Power	36W±5%
LED Chips brand	Epistar/Osram SMD LED Chips
Lumens	3400-3600lm
Color temperature	3000K/4000K-4500K/6000K-6500K
Driver	Top quality driver included
Input voltage	100-240VAC /220-240VAC 50/60Hz
Power factor	>0.6
CRI	>80
SDCM	<5
Working life	>30000Hrs
Efficiency	>85%
Materials	Aluminum body+PC Cover
Beam angle	120°
Dimmable	No
IP Grade	IP44
Emergency kit	No
Working temperature	-25°C~+55°C
Storage temperature	-30°C~+60°C
Standard	CE LVD EMC RoHs
Warranty	2Years