



## TRIMLESS LED DOWNLIGHT

Ref No: GR-DL-20WG-01



LED Downlight adopt trimless design, better to integrated with building. and its heat sink can be rotation about 25° to be wall washer lighting. Top quality body and high CRI, high lumens, and white/black/silver/gold reflectors options. It is also ideal for all commercial lighting applications as well as public indoor space.




### Complete Product Data

Order Number	GR-DL-20WG-01
Total Wattage	20W±5%
Mounting Type	Trimless Recessed mounted
Dimension(mm)	L142*Ø92*H118mmmm
Outcut(mm)	Ø95mm
IP Grade	IP20 for complete product (IP44 from front)
Luminaries Lumens	1850-2100lm
Beam angle	24° as standard; 15°/36°/55° optional
Working temperature	-25°C ~ +55°C
Certificates standard	CE LVD EMC RoHS
Warranty	5Years
Package	/

### Control Gear/Driver Data

LED driver brand	LIFUD <sup>®</sup> EAGLERISE OSRAM
Input voltage	220-240VAC 50/60Hz
Output voltage	30-42Vdc
Output current	500-550mA
Power Factor	>0.5 as standard; >0.9 optional
Surge protection	1-2KV
Efficiency	>87% @230V
IP Grade	IP20
THD	<10% @230V
Dimmable	No, but available to select it as Triac/0-10V/DALI if needed
Free flicker	Yes
Protection	Open Circuit Protection / short Circuit protection/
Certificates	TUV、CCC、RCM、CE、CB
Warranty	5Years

## Material&Housing Data

Housing Color	White finished
Housing Material	Aluminum
Lens	/ 
Reflector material	PC reflector, white as standard, black/silver/gan black /god optional
Fixation material	Steel
Connector	Quickly connectors



## Photometric Data

LED chip brand	Bridgelux / Osram
Chip type	COB
Color temperature	2700-2800K/3000-3200K/4000-4500K/ 5700-6000K/ 6000-6500K
CRI	>Ra92
Life time	>50000Hrs
Lumens	110-130lm/W
SDCM	<5
Lumens maintenance	99.9%@1000hrs/ 99%@3000hrs /98%@10000hrs. (LM80)

## Optional

Dimming Type	Triac dim/ 0-10V dim/ DALI dimmable optional
Dimming driver brand	<b>KOPU</b> <b>EAGLE RISE</b> <b>OSRAM</b> <b>EUCHIPS</b> <b>Lifud</b> <b>LTECH</b> <b>SUNRICHER</b>
Emergency backup	Battery backup with 3Hours for 1-2Watt

## Dimension & Install

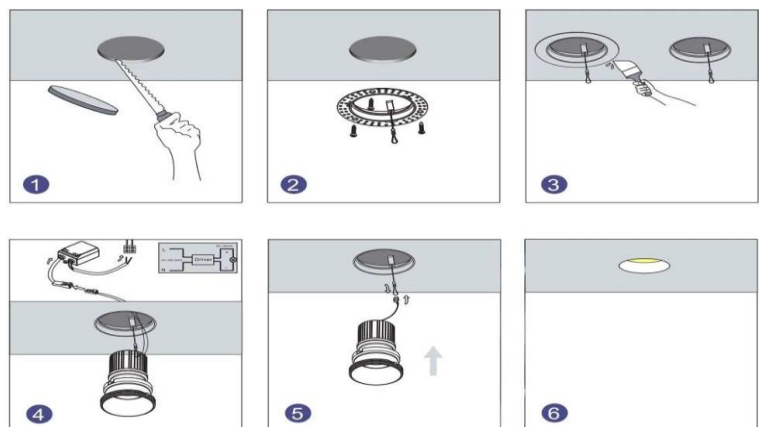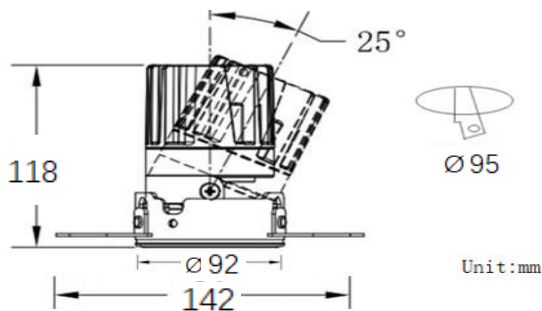

## Lighting Distribution

