

GR-SL-H-01 Series

TOP Garden street light



Type Y



Adjustable joint type



Type 7

Order Model	Power Watt	Lumens lm	Input	IP Grade	Install Diameter
GR-SL-20WH-01	20W	3000lm	100-265V	IP65	Φ60/75mm
GR-SL-30WH-01	30W	4500lm	100-265V	IP65	Φ60/75mm
GR-SL-50WH-01	50W	7500lm	100-265V	IP65	Φ60/75mm
GR-SL-70WH-01	70W	8400lm	100-265V	IP65	Φ60/75mm
GR-SL-100WH-01	100W	13000lm	100-265V	IP65	Φ60/75mm
GR-SL-150WH-01	150W	20000lm	100-265V	IP65	Φ60/75mm

GR-SL-R Series

Adjustable garden street light



Order Model	Power Watt	Dimension mm	Install diameter
GR-SL-50WR	50W	390*125*62	D50
GR-SL-100WR	100W	465*145*73	D60
GR-SL-150WR	150W	535*160*73	D60
GR-SL-200WR	200W	605*200*73	D60

GR-TY Series

Garden street light



Order Model	Power Watt	Lumens lm	Input	IP Grade	Install Diameter
GR-TY-20W	20W	3000lm	100-265V	IP65	Φ60/75mm
GR-TY-30W	30W	4500lm	100-265V	IP65	Φ60/75mm
GR-TY-50W	50W	7500lm	100-265V	IP65	Φ60/75mm
GR-TY-70W	70W	8400lm	100-265V	IP65	Φ60/75mm
GR-TY-100W	100W	13000lm	100-265V	IP65	Φ60/75mm
GR-TY-150W	150W	20000lm	100-265V	IP65	Φ60/75mm

GR-SL-K Series

Economy



Order Model	Power Watt	Dimension mm	Install diameter
GR-SL-50WK	50W	390*125*62	D50
GR-SL-100WK	100W	465*145*73	D60
GR-SL-150WK	150W	535*160*73	D60
GR-SL-200WK	200W	605*200*73	D60

GR-SL-B-01 Series

Long linear street light
50W/Modular



Order Model	Power Watt	Dimension mm	Lumens	IP Grade	Install Diameter
GR-SL-50WB-01	50W	265*103*77	6500lm	IP65	Φ60mm
GR-SL-100WB-01	100W	520*103*77	13000lm	IP65	Φ60mm
GR-SL-150WB-01	150W	775*103*77	19000lm	IP65	Φ60mm
GR-SL-200WB-01	200W	1030*103*77	25000lm	IP65	Φ60mm

GR-SL-C Series



Feature


- Grey/black finished
- Philips SMD3030 or COB, 100-110lm/W Output
- Photocell / 0-10V/Triac /DALI Dimmable options
- Isolated waterproof driver. 100-240VAC as standard, AC/DC12V 24V 48V available



Order Model	Power Watt	LED QTY PCS	PF	IP Grade	Install Diameter
GR-SL-50WC	50W	1pcs	>0.95	IP65	Φ50mm
GR-SL-100WC	100W	2pcs	>0.95	IP65	Φ60mm
GR-SL-150WC	150W	3pcs	>0.95	IP65	Φ60mm
GR-SL-200WC	200W	4pcs	>0.95	IP65	Φ60mm
GR-SL-250WC	250W	5pcs	>0.95	IP65	Φ60mm

- Integrated module heat sink., good for projects
- Philips SMD3030, 110-150lm/W Output
- DONE/PHILIPS/MEANWELL Driver,100-277VAC 50/60Hz or 12V/24V/36V/48VDC 2/3/5Years warranty
- Photocell / 0-10V/Triac Dimmable options. 70*140° beam angle


GR-SL-B Series
Popular modular type
50W/Modular

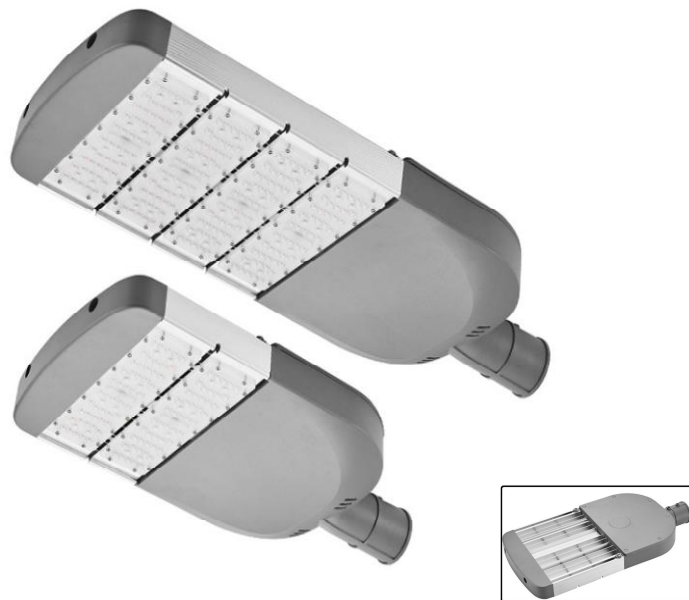

Order Model	Power Watt	Lumens lm	Input	IP Grade	Install Diameter
GR-SL-100WB	100W	13000lm	100-265V	IP65	Φ60mm
GR-SL-150WB	150W	19000lm	100-265V	IP65	Φ60mm
GR-SL-200WB	200W	26000lm	100-265V	IP65	Φ60mm
GR-SL-250WB	250W	31000lm	100-265V	IP65	Φ60mm
GR-SL-300WB	300W	38000lm	100-265V	IP65	Φ60mm
GR-SL-400WB	400W	50000lm	100-265V	IP65	Φ60mm

GR-SL-B-02 Series

Competitive Modular
110V-240VAC OR DC12V/24V/36V/48V optional

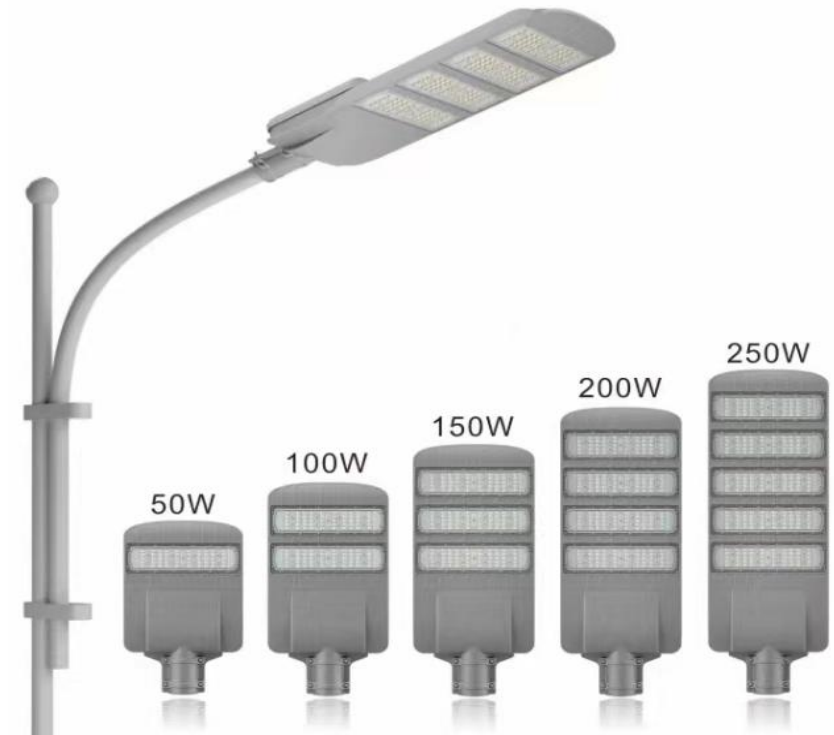

Order Model	Power Watt	Lumens lm	Input	IP Grade	Install Diameter
GR-SL-100WB-02	100W	11000lm	110-220V or 12V 24V 36V 48VDC	IP66	Φ60mm
GR-SL-150WB-02	150W	18000lm		IP66	Φ60mm
GR-SL-200WB-02	200W	24000lm		IP66	Φ60mm
GR-SL-250WB-02	250W	29000lm		IP66	Φ60mm

- Adjustable 90°
- Lumileds/Bridgelux SMD Chips, 110-140lm/W output, 2700K-6500K
- Photocell / 0-10V/Triac /DALI Dimmable / SPD(10-20KV) optional
- DONE /Meanwell/ PHILIPS Driver, 3/5Years warranty, 100-277VAC 50/60Hz



GR-SL-D Series

90° adjustable
50W/Modular

Order Model	Power Watt	Lumens lm	PF	IP Grade	Install Diameter
GR-SL-100WD	100W	12000lm	>0.95	IP65	Φ60mm
GR-SL-150WD	150W	18000lm	>0.95	IP65	Φ60mm
GR-SL-200WD	200W	26000lm	>0.95	IP65	Φ60mm
GR-SL-250WD	250W	32000lm	>0.95	IP65	Φ60mm
GR-SL-300WD	300W	38000lm	>0.95	IP65	Φ60mm
GR-SL-400WD	400W	50000lm	>0.95	IP65	Φ60mm

GR-SL-D-02 Series

Removable modular
50W/modular



Order Model	Power Watt	LED QTY PCS	PF	IP Grade	Install Diameter
GR-SL-50WD-02	50W	64pcs	>0.95	IP66	Φ60mm
GR-SL-100WD-02	100W	128pcs	>0.95	IP66	Φ60mm
GR-SL-150WD-02	150W	192pcs	>0.95	IP66	Φ60mm
GR-SL-200WD-02	200W	256pcs	>0.95	IP66	Φ60mm
GR-SL-250WD-02	250W	320pcs	>0.95	IP66	Φ60mm

GR-SL-H Series

Top level-Tool free



Feature

- Clip parts, free-tool design
- Adjustable installation joint, 130-160lm/W output
- Meanwell/ Philips/ DONE driver top quality types, 3/5 Years warranty
- Photocell/ 0-10V dimmable/ Cut-off switch available, 60°/90°/120°/T2M/T3M/T4M beam angle



Order Model	Power Watt	Lumens lm	PF	IP Grade	Install Diameter
GR-SL-50WH	50-60W	7500lm	>0.95	IP66	Φ60mm
GR-SL-100WH	100W	14000lm	>0.95	IP66	Φ60mm
GR-SL-150WH	150-180W	22000lm	>0.95	IP66	Φ60mm
GR-SL-200WH	200W	28000lm	>0.95	IP66	Φ60mm
GR-SL-250WH	250W	33000lm	>0.95	IP66	Φ60mm
GR-SL-300WH	300W	42000lm	>0.95	IP66	Φ60mm

GR-SL-H-02 Series

Competitive item



Feature

- Lens cover+Toughed glass cover.
- Philips/osram SMD LED Chips, 110-150lm/W output. 70°*140° beam angle
- Isolated driver /Meanwell/ Philips/ DONE, 2/3/5 Years warranty. 6-20KV Surge protection



Order Model	Power Watt	LED QTY PCS	PF	IP Grade	Install Diameter
GR-SL-100WH-02	100W	112pcs	>0.95	IP66	Φ60mm
GR-SL-120WH-02	120W	168pcs	>0.95	IP66	Φ60mm
GR-SL-150WH-02	150W	224pcs	>0.95	IP66	Φ60mm

GR-SSL-E Series


Top level- All in Two



Order Model	Lumens Watt	LiFepo4 Battery	Solar Panel	IP Grade	Install height
GR-SSL-30WE	3000lm	12.8V 18AH	18V 40W	IP65	5-6m
GR-SSL-40WE	4000lm	12.8V 24AH	18V 50W	IP65	6-7m
GR-SSL-50WE	5000lm	12.8V 30AH	18V 65W	IP65	7-8m
GR-SSL-60WE	6000lm	12.8V 36AH	18V 80W	IP65	7-9m
GR-SSL-80WE	8000lm	12.8V 42AH	18V 100W	IP65	8-9m
GR-SSL-100WE	10000lm	12.8V 54AH	18V 130W	IP65	9-10m
GR-SSL-120WE	12000lm	12.8V 60AH	18V 170W	IP65	10-12m

GR-SSL-A Series

Top level-All in One

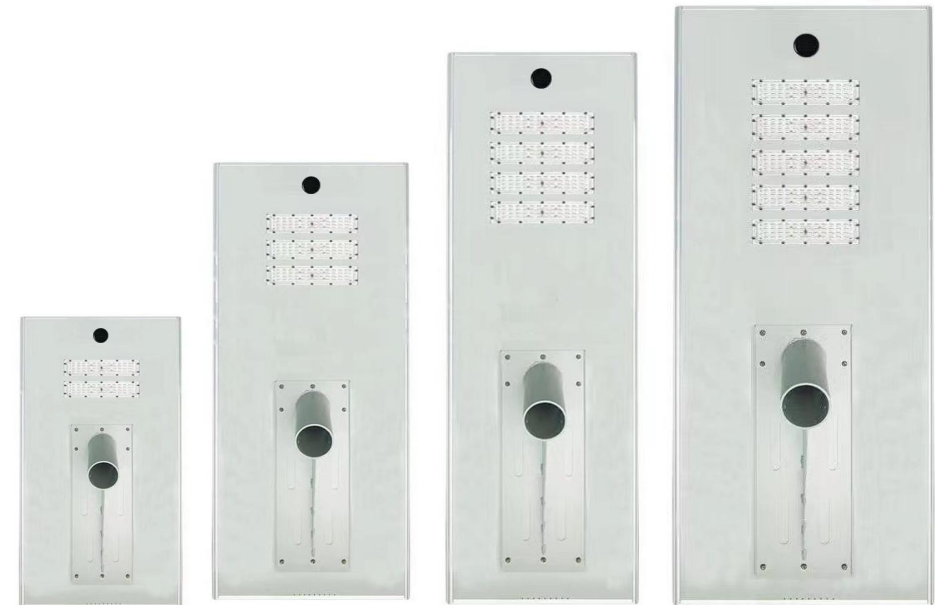

Order Model	Lumens Watt	LiFepo4 Battery	Solar Panel	IP Grade	Install height
GR-SSL-60WA	6000lm	12.8V 20AH	18V 60W	IP65	5-6m
GR-SSL-80WA	8000lm	12.8V 35AH	18V 80W	IP65	6-8m
GR-SSL-100WA	10000lm	12.8V 50AH	18V 100W	IP65	7-8m
GR-SSL-120WA	12000lm	12.8V 50AH	18V 130W	IP65	7-9m
GR-SSL-150WA	13000lm	12.8V 65AH	18V 170W	IP65	8-9m
GR-SSL-180WA	15000lm	12.8V 80AH	18V 200W	IP65	9-10m
GR-SSL-200WA	18000lm	25.6V 50AH	36V 220W	IP65	10-12m