



HIGH LUMEN HIGH BAY LIGHT

Ref No: GR-HB-150WB-01



LED high bay light with highest lumens led chips, the lumens output up to 150-190lm/W, delivers a superior LED alternative that's up to 90% more energy efficient than the conventional HPS, Metal halide bay light retrofits. **available to do emergency kits, radar sensor, and 0-10V, DALI dimmable.**

It is also ideal for all industrial lighting applications as well as public indoor spaces, such as warehouses, bus stations, Mine, Factories, etc..

Complete Product Data

Order Number	GR-HB-50WB-01
Total Wattage	150W±5%
Install	Suspension as standard; surface mounted available by bracket
Dimension(mm)	Ø300*176mm
IK Rate	IK08
IP Grade	IP65
Luminaries Lumens	22500lm-28000lm
Beam angle	90° as standard; 60°/120° optional
Working temperature	-25°C ~ +60°C
Certificates standard	CE LVD EMC RoHS
Warranty	3/5Years
Package	/

Control Gear/Driver Data

LED driver Type	MOSO®
Input voltage	120-277VAC 50/60Hz
Output voltage	90-130V
Output current	750-1100mA
Power Factor	>0.95
Surge protection	4-6KV
Efficiency	>91% @230V
IP Grade	IP66
THD	<10% @230V
Dimmable	No
Working temperature	-25°C ~ +55°C
Protection	Short circuit, open circuit, overcurrent, overvoltage protection
Certificates	TUV CE ROHS SAA ENEC
Warranty	3/5Years

Material&Housing Data

Housing Color	Black
Housing Material	Die-cast aluminum
Cover material	PC lens Cover, anti-UV
Reflector	/
Bracket	Metal
Cable	High temperature resistant, anti-aging, insulated rubber cable.

Photometric Data


LED chip brand	Philips
Chip type	SMD 2835
Color temperature	3000-3200K/4000-4500K/ 5700-6000K
CRI	>Ra80
Life time	>50000Hrs
Lumens	160-190lm/W
SDCM	<5
Lumens maintenance	99.9%@1000hrs/ 99%@3000hrs /98%@10000hrs. (LM80)

Optional

Dimming Type	PMW/0-10V/DALI dimmable optional
Dimming driver brand	MOSO  OSRAM
Emergency kit	9W-18W Battery backup for 1-3hours
Radar sensor	Yes (sensor distance 12-15meter)
Bracket	Yes for surface mounted




Bracket



Lamp shade

Dimension

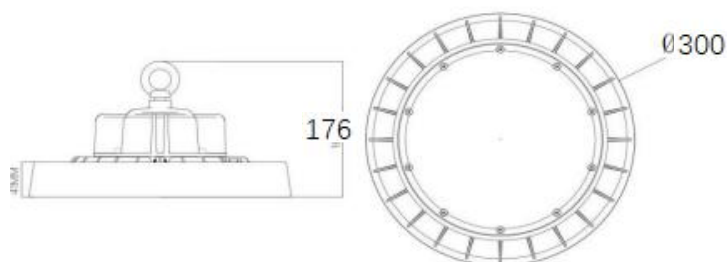

Unit:mm

Lighting Distribution

