



EMERGENCY HIGH BAY LIGHT

Ref No: GR-HB-200WB(EM)



LED high bay light is with emergency backup (10W-15W with 1-3hrs duration). and its highest lumens led chips, the lumes output up to 160-190lm/W, delivers a superior LED alternative that's up to 90% more energy efficient than the conventional HPS, Metal halide bay light retrofits.

It is also ideal for all industrial lighting applications as well as public indoor spaces, such as warehouses, bus stations, Mine, Factories, etc..

Complete Product Data

Order Number	GR-HB-200WB (EM)
Total Wattage	200W±5%
Install	Suspension as standard; surface mounted available by bracket
Dimension(mm)	Ø365*175mm
IK Rate	IK08
IP Grade	IP65
Luminaries Lumens	29000lm-38000lm
Beam angle	90° as standard; 60°/120° optional
Working temperature	-25°C ~ +55°C
Certificates standard	CE LVD EMC RoHS
Warranty	3/5Years
Emergency kits	10W with 1 hours duration as standard, 15W with 1-3hours duration optional

Control Gear/Driver Data

LED driver Type	Moso/SUNCOM brand
Input voltage	220-240VAC 50/60Hz
Output voltage	90-130V
Output current	1500-1600mA
Power Factor	>0.95
Surge protection	4-6KV
Efficiency	>91% @230V
IP Grade	IP66
THD	<10% @230V
Dimmable	No
Working temperature	-25°C ~ +55°C
Protection	Short circuit, open circuit, overcurrent, overvoltage protection
Certificates	TUV CE ROHS SAA ENEC
Warranty	3/5Years

Material&Housing Data

Housing Color	Black
Housing Material	Die-cast aluminum
Cover material	PC lens Cover, anti-UV
Reflector	/
Bracket	Metal
Cable	High temperature resistant, anti-aging, insulated rubber cable.

Photometric Data


LED chip brand	Philips
Chip type	SMD 2835
Color temperature	3000-3200K/4000-4500K/ 5700-6000K
CRI	>Ra80
Life time	>50000Hrs
Lumens	160-190lm/W
SDCM	<5
Lumens maintenance	99.9%@1000hrs/ 99%@3000hrs /98%@10000hrs. (LM80)

Optional

Dimming Type	PMW/0-10V/DALI dimmable optional
Dimming driver brand	Moso/SOSEN/MEANWELL
Sensor	Radar Sensor optional
Input voltage	AC/DC12V/24V/48V optional
Bracket	Yes for surface mounted




Bracket



Lamp shade

Dimension

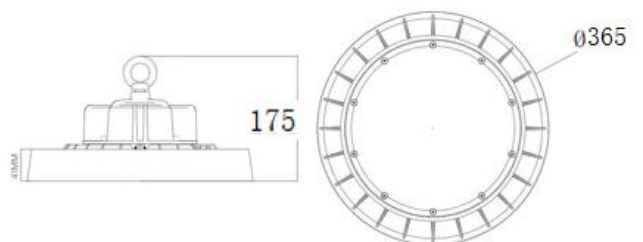

Unit:mm

Lighting Distribution

