



LED TRIPROOF BATTEN

Ref No: GR-TP-5F1A



LED Triproof batten is a superior LED alternative that's up to 60% more energy efficient than the conventional light. It is with SMD LED Chips, highest brightness, and PC body with stainless steel clips. protection level up to IP65, it is working well in bad environments. widely used for warehouse, parking lots, residential or commercial, industrial areas.

Complete Product Data

Order Number	GR-TP-5F1A
Total Wattage	30W±5%
Mounting Type	Surface as standard, suspended optional by steel ropes
Dimension(mm)	L1500*W83*H72mm
Outcut(mm)	/
IP Grade	IP65
Luminaries Lumens	3300-4200lm
Beam angle	120°
Working temperature	-30°C ~ +55°C
Certificates standard	CE LVD EMC RoHS
Warranty	3/5Years
Package	/

Electrical Data

LED driver Type	Normal driver/ LiFud/Osram driver options
Input voltage	100/220-240VAC 50/60Hz
Output voltage	36-80Vdc
Output current	750-800mA
Power Factor	>0.9
Surge protection	1KV
Efficiency	>88% @230V
IP Grade	IP22
THD	<15% @230V
Dimmable	No, but available to select it as Triac/0-10V/DALI if needed
Free flicker	/
Protection	Short circuit, open circuit, overcurrent, overvoltage protection
Certificates	CE RoHS
Warranty	3/5Years

Material&Housing Data

Housing Color	Grey
Housing Material	PC bottom
Cover material	PC Cover, Milky color
Gland connector	Plastic
Surface part	Steel
Clips	Steel clips




Photometric Data

LED chip brand	Bridgelux / Epistar / Osram
Chip type	SMD 2835
Color temperature	2700-2800K/3000-3200K/4000-4500K/ 5700-6000K/ 6000-6500K
CRI	>Ra80
Life time	>50000Hrs
Lumens	120-160lm/W
SDCM	<5
Lumens maintenance	99.9%@1000hrs/ 99%@3000hrs /98%@10000hrs. (LM80)

Optional

Dimming Type	Triac dim/ 0-10V dim/ DALI dimmable and Emergency backup optional
Dimming driver brand	KOPU/LiFud/Eagleries
Emergency backup	Battery backup with 3Hours for 3-5Watt
Pendant accessories	steel ropes 2pcs/sets, 1m long

Dimension

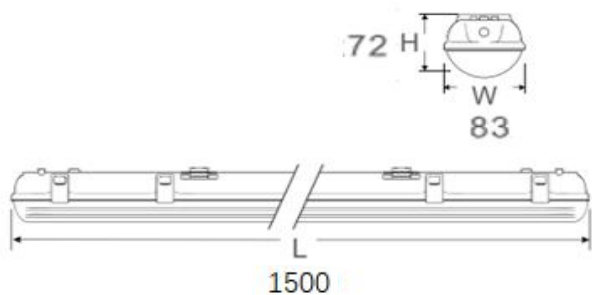

Unit:mm

Lighting Distribution

