



BROCHURE

Greenriy Technology Co., Limited

info@grnled.com Tel/Whats app:+8613570825764 [Https://grnled.com](https://grnled.com)



Profile

Greenriy Technology Co., Limited/Shenzhen Gelvmei Technology Co., Ltd with brand GRNLED, GOLUMEN, and EuroLight which is especially for Nigeria Market is a professional manufacturer, factory, supplier of Led lights. Established in 2014 at Shenzhen city in China, has grown from its humble origins into an lighting industry leader and the best manufacturer and supplier. By focusing on advanced led technologies and outstanding talent, GRNLED offers professionals and users the solutions and support their need for a wide variety of applications. Our production capacity up to 10000pcs/days for common standard lighting. We pursue the following company culture to create the greatest value for customers.

WHY US

- Certification: ISO9001:2015 listed. And all products are CE Certified, RoHS Compliant.
- One-stop supply: Mostly all types led lights we can produce.
- Better price: Our led lamps are 10%-30% cheaper than other suppliers on the market.
- OEM ODM Service: Accept OEM ODM for different items.
- Faster delivery: Delivery time is fastest, some items is only 1-3days.
- Quality Control: Each lights will be 8-12hours age test before sent out.

WARRANTY

- The basic warranty periods for our led lights is 2-3years, and 5years .
- During guarantee periods, GRNLED provide following supports
- We can send FREELY new products or spares to you if there is any quality issues caused by us within guarantee periods,
- Out of warranty period, It is ok for us to provide extra spares, but all expense for repair and shipping cost should be on customers.

PARTNERS



Factory View



Business License



Export Experience Rights Record



ISO9001:2005



CE



RoHS





Single Round Wall light

- Bridgelux COB, CRI90;90-100lm/W.
- Aluminum body+toughed glass, Grey finished, IP65; 30°



Order Model	GR-BD-7WP	GR-BD-9WP	GR-BD-15WP	GR-BD-20WP
Wattage	7W	9W-10W	15W	18W-20W
Size(mm)	Φ90*160MM	Φ108*200MM	Φ108*200MM	Φ145*200MM

Outdoor Up down Wall light

- Beam angle: 30°; IP65.
- Aluminum body+toughed glass cover, Grey/Black finished optional.110-265VAC 50/60Hz



Order Model	GR-BD-2x7WA	GR-BD-2x10WA	GR-BD-2x15WA	GR-BD-2x20WA
Wattage	2x7W	2x10W	2x15W	2x20W
Size(mm)	Φ90*H260	Φ108*H300	Φ108*H300	Φ145*H300

Rectangle Wall Light

- Source: Bridgelux smd CRI80, 90-100lm/W.
- Aluminum body+toughed glass cover,IP65 waterproof; 30°.110-265VAC 50/60Hz




Order Model	GR-BD-20T	GR-BD-30T	GR-BD-50T
Wattage	12W	18W	24W
Size(mm)	L200*W50*H80	L300*W50*H80	L500*W50*H80

High Power Wall Pack Light

- Source:Epistar SMD Chips,110-140lm/W;CRI80
- Aluminum body, Coffe finished , IP65.110-265VAC 50/60Hz



Order Model	GR-BD-50WP	GR-BD-70WP	GR-BD-100WP	GR-BD-120WP
Wattage	50W-60W	70W	100W	120W
Size(mm)	336*216*182	336*216*182	385*247*195	385*247*195

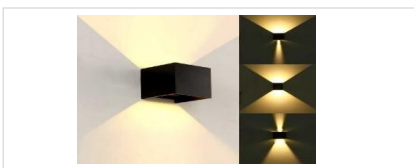

IP65 Adjustable Up down wall light
GR-BD-2x3WE (10*10*10CM)



Waterproof up down wall light
GR-BD-2x5WD Round/Square (GU10 option)



Single head wall light
GR-BD-5WF Round/Square(GU10 option)

Round Aluminum LED Bulkhead

- Source: Bridgelux SMD Chips, 100lm/W; CRI80
- Aluminum body, white/Black finished optional, IP65. 110-265VAC 50/60Hz



Order Model	GR-BD-12WR	GR-BD-15WR	GR-BD-18WR	GR-BD-24WR
Wattage	12W	15W	18W	24W
Size(mm)	Ø225*H90	Ø275*H100	Ø275*H100	Ø275*H100

Oval Alumium LED Bulkhead


- Source: Bridgelux SMD Chips, 100lm/W; CRI80
- Aluminum body, white/Black finished optional, IP65. 110-265VAC 50/60Hz



Order Model	GR-BD-12WT	GR-BD-15WT	GR-BD-18WT
Wattage	12W	15W	18W
Size(mm)	L225*W80*H90	L275*W80*H90	L275*W80*H90

Oval Alumium LED Bulkhead

- Source: Bridgelux SMD Chips, 100lm/W; CRI80
- Aluminum body, white/Black finished optional, IP65. 110-265VAC 50/60Hz



Order Model	GR-BD-30G	GR-BD-40G	GR-BD-60G	GR-BD-80G	GR-BD-100G	GR-BD-120G	GR-BD-150G
Wattage	6W	9W	12W	15W	20W	25W	28W
Size(mm)	L300*W80*H50	L400*W80*H50	L600*W80*H50	L800*W80*H50	1000*W80*H50	1200*W80*H50	1500*W80*H50



IP65 Square recessed wall light
GR-BD-L-03 / 3W 100-240VAC 50/60Hz
L86*W86mm, Cutout:80*80mm



Rectangle wall light IP65
GR-BD-L-02 / 5W 100-240VAC 50/60Hz
L210*W60*H55mm, Cutout:205*55mm



Narrow recessed wall light
GR-BD-L-01/ 3W 110-240VAC
L185*W40*H45mm, cutout: 170*w35mm



IP65 Rectangle recessed wall light
GR-BD-L-04/ 7W/9W/12W/15W options
L160*W100*H60mm, cutout:155*w95mm



IP65 Square recessed wall light
GR-BD-L-05 / 9W-12W 15W 18W options
L160*W160*H65mm, cutout:155*155mm



Round recessed wall light ip65
GR-BD-L-06/ 3W
D82*82*45MM, Cutout:78mm



■ Spike/Ground Spotlight

- Beam angle: 30°; IP66.100-240VAC 50/60Hz.
- Aluminum body+toughed glass cover, adjustable bracket.



Order Model	GR-SP-3WB	GR-SP-5WB	GR-SP-7WB	GR-SP-10WB	GR-SP-15WB
Wattage	3W	5W	7W	10W	15W
Size(mm)	φ42*L80mm	φ50*L90mm	φ58*L120mm	φ61*L140mm	φ75*L160mm



■ Top outdoor Spotlight

- Beam angle: 30°; IP66. adjustable body.100-240VAC 50/60Hz.
- Source: Bridgelux chips,CRI80; 100lm/W. Ground/Spike installation optional



Order Model	GR-SP-10WH	GR-SP-20WH	GR-SP-30WH
Wattage	10W	20W	30W
Size(mm)	φ80*L130	φ80*L130	φ108*L170




■ Economy Tree Spotlight

- Beam angle: 30°; IP66, Spike/ground installation optional
- Source: Bridgelux chips,CRI80; 100lm/W.100-165VAC 50/60Hz.



Order Model	GR-SP-5WA	GR-SP-6WA	GR-SP-9WA	GR-SP-12WA	GR-SP-18WA	GR-SP-24WA	GR-SP-36WA
Wattage	5W	6W	9W	12W	18W	24W	36W
Size(mm)	φ95	φ125	φ155	φ155	φ185	φ205	φ235

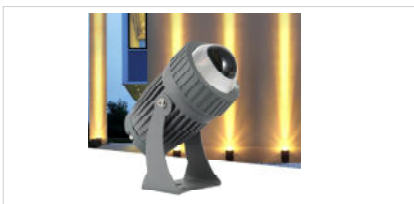

Narrow beam Outdoor spotlights
GR-SP-10WM (5-10°, IP66,220VAC)



GU10 LED Spike light
GR-SP-GU10 IP65 220VAC



Square spotlights, ip66
GR-SP-K / 9W 18W -72W Options



■ DC24V Inground Light

- input voltage: DC24V or 12V; IP66. Lifetime:50000Hrs
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-1WB42	GR-GL-1WB52	GR-GL-1W-62B	GR-GL-3WB
Wattage	1W	1W	1W	3W
Outcut(mm)	φ38*H85	φ48*H95	φ58*H105	φ70*H105

■ Side-lighting Inground light

- input voltage:AC/ DC24V or 12V.IP66
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-1WA42	GR-GL-1WA52	GR-GL-1WA62	GR-GL-1WA75
Wattage	1W	1W	2W	3W
Outcut(mm)	φ38*H85	φ48*H90	φ58*H100	φ68*H105

■ Project led Inground Light

- input voltage:110-240VAC 50/60Hz.IP66. 30°
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-1WA	GR-GL-3WA	GR-GL-6WA	GR-GL-9WA	GR-GL-18WA	GR-GL-24WA	GR-GL-36WA
Wattage	1W	3W	6W	9W/12W	18W	24W	36W
Outcut(mm)	φ38*H65	φ95*H90	φ115*H95	φ140*H105	φ195*H105	φ195*H105	φ200*H105

■ Square LED Inground Light

- input voltage:110-240VAC 50/60Hz.IP66. 30°
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-4WF	GR-GL-5WF	GR-GL-6WF	GR-GL-9WF	GR-GL-12WF	GR-GL-16WF	GR-GL-24WF
Wattage	4W	5W	6W	9W	12W	16W	24W
Outcut(mm)	90*90	115*115	130*130	140*140	150*150	190*190	240*240

■ Linear LED Inground light

- input voltage:110-240VAC 50/60Hz. IP66,30°
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-5WL	GR-GL-6WL	GR-GL-9WL	GR-GL-12WL	GR-GL-18WL	GR-GL-24WL	GR-GL-36WL
Wattage	3/5W	6W	9W	12W	18W	24W	36W
Outcut(mm)	L190*W80	L290*W85	L290*W85	L590*W85	L590*W85	L990*W85	L990*W85



Swimming Pool Light

- Input voltage: AC/DC24V or 12V; IP68
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-UL-9WE	GR-UL-12WE	GR-UL-18WE
Wattage	9W	12W	18W
Diameter(mm)	φ230	φ230	φ295

Ground Underwater Led Light

- Input voltage: AC/DC24V or 12V; IP68
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-UL-6WA	GR-UL-9WA	GR-UL-12WA	GR-GL-18WA	GR-GL-24WA
Wattage	6W	9W	12W	18W	24W
Diameter(mm)	φ120*H140	φ145*H180	φ145*H180	φ175*H210	φ210*H230

Embaded Underwater Light

- Input voltage: AC/DC24V or 12V; IP68
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-UL-6WB	GR-UL-9WB	GR-UL-12WB	GR-GL-18WB	GR-GL-24WB
Wattage	6W	9W	12W	18W	24W
Outcut(mm)	φ115*H95	φ145*H115	φ155*H100	φ195*H115	φ195*H115

DC24V/12V Linear Wall Washer Light

- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional
- Aluminum body+toughed glass, IP67. Isolated driver, 2/3years warranty



Order Model	GR-WW-18WB	GR-WW-24WB	GR-WW-36WB
Wattage	18W	24W	36W
Length(mm)	φ38*H85	φ48*H95	φ58*H105

110/220VAC Linear Wall washer light

- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional
- Aluminum body+toughed glass, IP67. Isolated driver, 2/3years warranty



Order Model	GR-WW-9WA	GR-WW-18WA	GR-WW-24WA	GR-WW-36WA	GR-WW-48WA
Wattage	9W	18W	24W	36W	3W
Length(mm)	500	1000	1000	1000	1000



■ Classic Garden Pole light

- Including Type Y, Type 7, D60mm and D75mm installation diameter options. 90° beam angle
- Aluminum body+PC cover, IP65. 110-265VAC 50/60Hz. 110-140lm/W.

Order Model	GR-TY-30W	GR-TY-50W	GR-TY-70W	GR-TY-100W	GR-TY-150W
Wattage	30W	50W	70W	100W	150W
Size(mm)	Ø380*H563mm	Ø380*H563mm	Ø380*H563mm	Ø380*H563mm	Ø380*H563mm



■ Top Garden Pole Light

- Including Type Y, Type 7, D75mm installation diameter. 60°, 90°, 120°, T2M, T3M, 75°x160° beam angle options
- Aluminum body+toughed glass, IP65. 110-265VAC 50/60Hz. 110-140lm/W.

Order Model	GR-SL-30WH-1	GR-SL-50WH-1	GR-SL-70WH-1	GR-SL-100WH-1	GR-SL-150WH-1
Wattage	30W	50W	70W	100W	150W
Length(mm)	Ø423*H520mm	Ø423*H520mm	Ø423*H520mm	Ø423*H520mm	Ø423*H520mm



Type 7



■ GR-BL-A Series

100-240VAC 50/60Hz. IP65 3Years warranty

Model	Wattage	Size(mm)
GR-BL-600A	7W	Ø108*H600
GR-BL-800A	7W	Ø108*H800
GR-BL-1000A	7W	Ø108*H1000



■ GR-BL-E Series

100-240VAC 50/60Hz. IP65 3Years warranty

Model	Wattage	Size(mm)
GR-BL-300B	7W	L160*H300
GR-BL-600B	7W	L160*H600
GR-BL-800B	7W	L160*H800



■ GR-BL-B Series

100-240VAC 50/60Hz. IP65 3Years warranty

Model	Wattage	Size(mm)
GR-BL-300B	7W	Ø120*H300
GR-BL-600B	9W	Ø120*H600
GR-BL-800B	9W	Ø120*H800



■ GR-BL-D Series

100-240VAC 50/60Hz. IP65 3Years warranty

Model	Wattage	Size(mm)
GR-BL-600D	9W	Ø120*H600
GR-BL-800D	9W	Ø120*H800
GR-BL-1000D	9W	Ø120*H1000



■ GR-BL-F Series

100-240VAC 50/60Hz. IP65 3/5Years warranty


Model	Wattage	Size(mm)
GR-BL-300F	7W	Ø150*H300
GR-BL-600F	9W	Ø150*H600
GR-BL-800F	9W	Ø150*H800



■ GR-TY-M Series



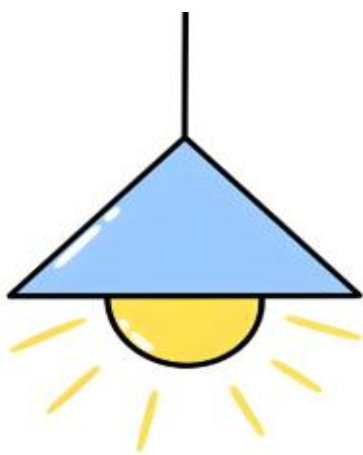


E27 Type as standard.
Aluminum / plastic body options. IP65

Model	Dimension(mm)	Wattage
GR-BL-7WM	LW210*H250	5W/7W
GR-BL-12WM	LW260*H310	9W/12W



Light up your places



 Add: 6 Floor, No 37th, Block 9, Fu'Ding Street, Tiebian Village, Henglan Town, Zhongshan, China
 +86 13570825764
 info@grnled.com / grnled01@gmail.com
 +86 13570825764 (whatsapp/ wechat ID)
 <https://grnled.com>