



PENDANT DOWNLIGHT

Ref No: GR-DL-5W (Pendant)



LED pendant downlight features a distinctive long cylinder shape. It also offers the flexibility to be used as track lighting with the addition of a track head. The length of this pendant ceiling light is customizable, with 30cm, 50cm, 60cm, 80cm, or 100cm options. This pendant light provides illumination and adds a stylish touch to the décor, making it a popular choice for contemporary interior lighting designs.



Complete Product Data

Order Number	GR-DL-3030	GR-DL-3050	GR-DL-4030	GR-DL-4050	GR-DL-5530	GR-DL-5550
Dimension(mm)	Φ30*L300	Φ30*L500	Φ40*L300	Φ40*L500	Φ55*L300	Φ55*L500
Wattage	5W±5%	5W±5%	5W±5%	5W±5%	5W±5%	5W±5%
Free flicker	YES					
Beam angle	24°					
IP Grade	IP22					
Luminaries Lumens	450-500lm					
Storage temp	-30°C ~ +60°C					
Working temperature	-25°C ~ +55°C					
Certificates standard	CE LVD EMC RoHS					
Warranty	3/5Years					
Mounting Type	Surface mounted/ Suspended installation					

Control Gear Data

LED driver brand	GUANX/LiFud/Eagleries brand options
Input voltage	220-240VAC 50/60Hz
Output voltage	10-42Vdc
Output current	100-120mA
Power Factor	>0.5
Surge protection	1KV
Efficiency	>86% @230V
IP Grade	IP22
THD	<15% @230V
Dimmable	No, but available to select it as Triac/0-10V/DALI if needed
Free flicker	Yes
Protection	Short circuit, open circuit, overcurrent, overvoltage protection
Certificates	CCC、RCM、CE、CB
Warranty	3/5Years

Material&Housing Data

Housing Color	Matt white/ black / Gold housing color
Housing Material	Aluminum
Cover material	polycarbonate Cover
Reflector	/
Suspended rope	Optional 1-1.5m/pcs
Surface part	Metal


Photometric Data

LED chip brand	Bridgelux /Osram
Chip type	COB
Color temperature	2700-2800K/3000-3200K/4000-4500K/ 5700-6000K/ 6000-6500K
CRI	>Ra90
Life time	>50000Hrs
Lumens	120-140lm/W
SDCM	<5 or <3
Lumens maintenance	99.9%@1000hrs/ 99%@3000hrs /98%@10000hrs. (LM80)

Optional

Dimming Type	Triac dim/ DALI/0-10V dimmable optional
Dimming driver brand	 KOPU
Emergency backup	/

Dimension

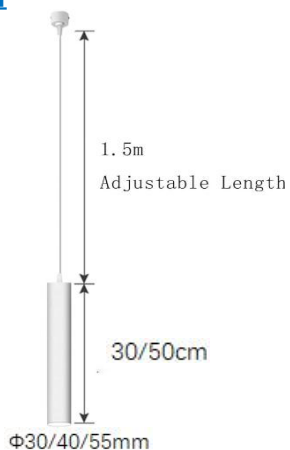

Lighting Distribution

