



BROCHURE

Greenriy Technology Co., Limited



Profile

Greenriy Technology Co.,Limited/Shenzhen Gelvmei Technology Co.,Ltd with brand GRNLED, GOLUMEN, and EuroLight which is especially for Nigeria Market is a professional manufacturer, factory, supplier of Led lights. Established in 2014 at Shenzhen city in China, has grown from its humble origins into an lighting industry leader and the best manufacturer and supplier. By focusing on advanced led technologies and outstanding talent, GRNLED offers professionals and users the solutions and support their need for a wide variety of applications. Our production capacity up to 10000pcs/days for common standard lighting. We pursue the following company culture to create the greatest value for customers.

WHY US

- Certification: ISO9001:2015 listed. And all products are are CE Certified, RoHS Compliant.
- One-stop supply: Mostly all types led lights we can produce.
- Better price: Our led lamps are 10%-30% cheaper than other suppliers on the market.
- OEM ODM Service: Accept OEM ODM for different items.
- Faster delivery: Delivery time is fastest, some items is only 1-3days.
- Quality Control: Each lights will be 8-12hours age test before sent out.

WARRANTY

- The basic warranty periods for our led lights is 2-3years, and 5years .
- During guarantee periods, GRNLED provide following supports
- We can send FREELY new products or spares to you if there is any quality issues caused by us within guarantee periods,
- Out of warranty period, It is ok for us to provide extra spares, but all expense for repair and shipping cost should be on customers.

PARTNERS



Content



Page 1-2
Magnetic Track Lighting



Page 3-5
LED Track Lights



Page 6
LED Panel Light



Page 7
LED Linear Light



Page 8
LED Batten Light



Page 9-23
LED Downlight/Ceiling Lights



Page 24-25
Highbay LED Light




Page 26
LED Street Lights



Page 27-28
LED Floodlight



Page 29-34
Outdoor Landscape Lighting

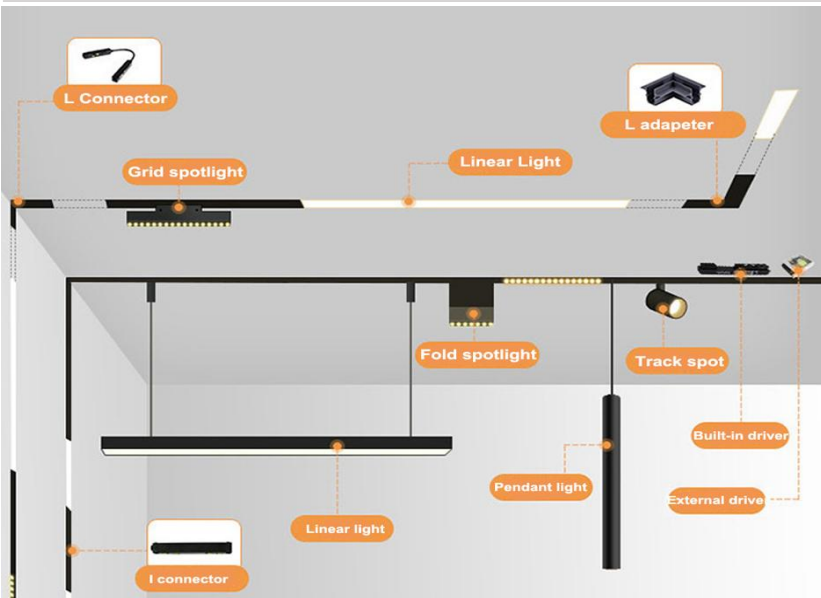

Feature

- DC48V Input ,safety
- Compatible with 20mm width track rail, black/white option
- DALI Dimmable/ Remote control, Zigbee 3CCT+Dim solution Working with Google Home, Amazon Alexa smart speaker and TUYA APP.
- CR180/90; Osram/Bridgelux SMD chips, 100-120lm/W.
- 50000Hrs lifetime, 2/3/5 Years warranty
- 3CCT color change by a Dial switch option.



Magnetic L profile Light
GR-ML-20WZL

Magnetic Linear Light

• DC48V 120°; Black/white finished;

Order Model	Power	Size(mm)
GR-ML-10WML	10W	L300*W22
GR-ML-20WML	20W	L600*W22
GR-ML-30WML	30W	L900*W22



Magnetic Grille Light

• DC48V 24°/36°; Black/white finished

Order Model	Power	Size(mm)
GR-ML-6WGS	6W	L112*W22
GR-ML-12WGS	12W	L220*W22
GR-ML-18WGS	18W	L328*W22
GR-ML-24WGS	24W	L435*W22
GR-ML-30WGS	30W	L543*W22



Magnetic Fold Light

• 24°/36°; Black/white finished; adjustable direction.

Order Model	Power	Size(mm)
GR-ML-6WFS	6W	L118*W22
GR-ML-12WFS	12W	L230*W22
GR-ML-18WFS	18W	L338*W22
GR-ML-24WFS	24W	L430*W22



Magnetic Spot Light

• 15/24/36°; Black/white finished;

Order Model	Power	Size(mm)
GR-ML-10WTL	10W	D50*100
GR-ML-15WTL	15W	D55*130
GR-ML-20WTL	20W	D60*135
GR-ML-25WTL	25W	D70*140




Magnetic Pendant Light

• DC48V 24°/36°; Black/white finished

Order Model	Power	Size(mm)
GR-ML-5WPL	5W	φ30*300mm
GR-ML-7WPL	7W	φ40*300mm
GR-ML-10WPL	10W	φ50*160mm



Magnetic Ball Light
GR-ML-10WBL

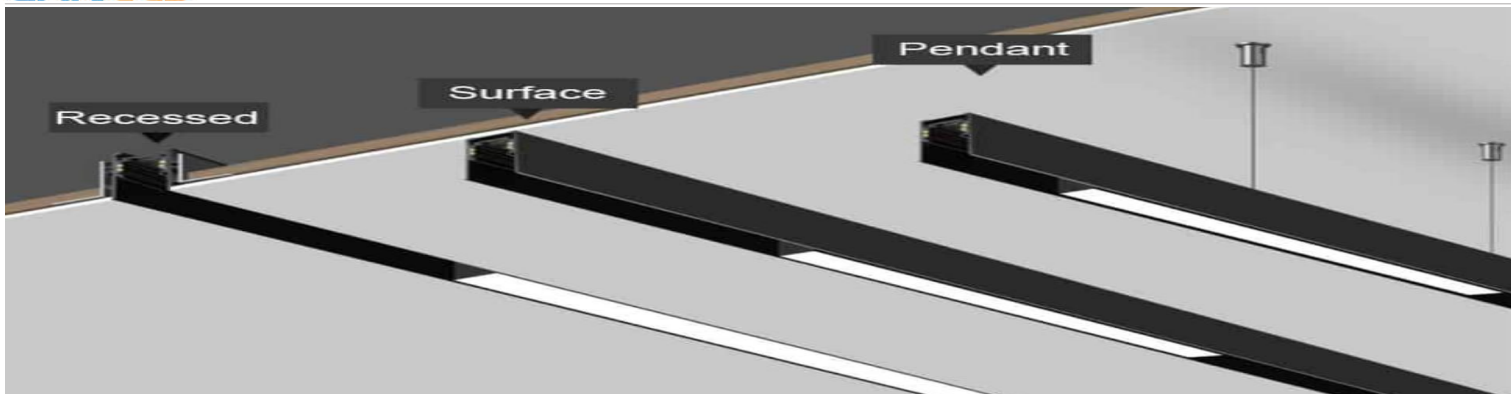


- Color body: Black/ White
- Conductor: 4 wires pure copper conductor
- Compatible for all magnetic light / 1000mm/2000mm/3000mm Length available




Recessed Track Rail

Model: GR-B27 (2.0mm thickness)

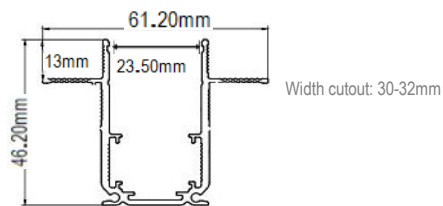


Trimless Track Rail

Model: GR-A05 (2.0mm thickness)

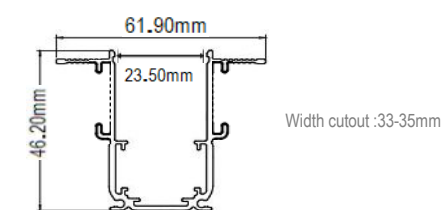

Surface/Pendant Rail


Model: GR-S201 (1.5mm thickness)



4 in 1 Magnetic track

One track can be compatible with surface, recessed, trimless, pendant installation

Model: GR-A01

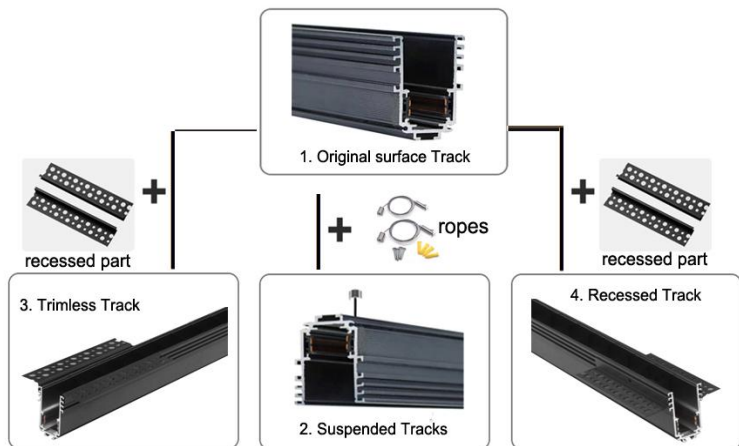

	GR-ML-L-01 L connector
	GR-ML-I-01 I connector
	T connector
	GR-ML-S Input cable
	GR-ML-Rope Suspension ropes
	L corner Horizontal and vertical options Recessed/Trimless/Surface options
	T corner Recessed/Trimless/Surface options
	Integrated driver AC110/220V input to 48VDC 100W/200W
	External driver AC110/220V input to 48VDC 100W 150W/200W/350W



Feature

- Driver: 110/220-240VAC 50/60Hz, isolated driver 2/3/5years warranty . CCT Tunable & Watts selectable options.
- Osram COB/Bridgelux COB, CRI>90, SDCM<3, 100-120LM/W
- 2Wires(single phase) as standard, 3 wires or 4 wires(3phases) options
- PF>0.5 as standard, >0.9 options.



Hot Sale & Competitive Track Light

- 24/36°; 2wires as standard, white/Black body options. CRI90, 100-240VAC.
- Competitive price for 3CCT tunable by a switch options for 10W 20W 30W.


Order Model	GR-TL-10WA	GR-TL-20WA	GR-TL-30WA	GR-TL-35WA	GR-TL-40WA
Power	10W	20W±5%	30W±5%	35W±5%	40W±5%
Dimension	Φ55x135	Φ67x145	Φ77x155	Φ90x160	Φ90x180



Integrated Driver LED Track Light

- Shorter body, latest popular high end. 110/220-240VAC 50/60Hz.
- Track head built in track rail, very stylish for high end shops. 1/3phases options.

Order Model	GR-TL-20WF	GR-TL-25WF	GR-TL-30WF	GR-TL-35WF	GR-TL-40WF
Power	20W±5%	25W±5%	30W±5%	35W±5%	40W±5%
Size(mm)	Φ90x90	Φ90x90	Φ100x100	Φ100x100	Φ100x106



Commercial LED Track Light

- Competitive price for 4 wires (3phases) type . 110/220-240VAC 50/60Hz.
- Beam angle 24/36° . LiFud/Eaglerise driver, super stable, CRI>92, PF>0.9. 0-10V/DALI dimmable options

Order Model	GR-TL-25WB	GR-TL-30WB	GR-TL-35WB
Power	25W±5%	30W±5%	35W±5%
Dimension	Φ100x150	Φ100x150	Φ100x150



Adjustable Beam angle Track Light

- Beam angle can be changed from 15° to 60°. 110/220-240VAC 50/60Hz.
- available to be CCT tunable by DIP switch, also ok to be with "driver in track" type

Order Model	GR-TL-10WD	GR-TL-15WD	GR-TL-20WD	GR-TL-25WD	GR-TL-30WD
Power	10W±5%	15W±5%	20W±5%	25W±5%	30W±5%
Size(mm)	Φ55x135	Φ65x165	Φ75x170	Φ75x170	Φ80x200mm





Honey comb

HOT SALE

Top Track Light

- 20W and 30W can be 3CCT & Wattages selectable.
- Different accessories like honey comb, extension arm, barn door can be options
- Competitive price for all wattages.
- Bridgelux COB CRI90, 110-240VAC 50/60Hz.



Barn Door



Collapsible Extension Arm


Order Model	Power Watt	Dimension mm
GR-TL-10WA-1	10W	Φ50x100mm
GR-TL-15WA-1	15W	Φ60*135mm
GR-TL-20WA-1	20W	Φ60*135mm
GR-TL-25WA-1	25W	Φ80x145mm
GR-TL-30WA-1	30W	Φ80x150mm
GR-TL-35WA-1	35W	Φ90x160mm

Square Track Light

- Beam angle 15/24/38/50/50°/70°/70°/90°/90°/35°/75° options



Order Model	GR-TL-10WP	GR-TL-15WP	GR-TL-20WP	GR-TL-30WP
Power	10W±5%	15W±5%	20W±5%	30W±5%
Dimenson	65*65*45mm	82*82*63mm	95*95*63mm	120*120*63mm

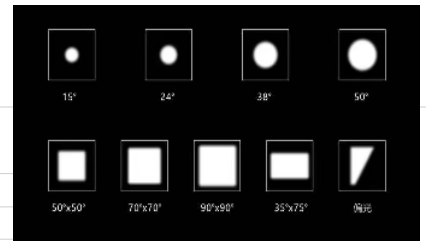

Linear LED Track Light

- Including linear profile and grille spotlight types
- Isolated driver type, only do high quality solution for commercial projects. Only 2wires type available



Order Model	GR-TL-10WL	GR-TL-18WL	GR-TL-28WL	GR-TL-35WL
Power	10W±5%	18W±5%	28W±5%	35W±5%
Dimenson	L214mm	L346mm	L478mm	L611mm



Order Model	Power	Remark
GR-TL-30WR	30W	1/3 phases



Order Model	Power	Remark
GR-TL-30WH	30W-35W	1/3 phases



Order Model	Power	Remark
GR-TL-30WS	30W-35W	1/3 phases



■ Top Track Light

- Different installation ways can be optional.
- 2wires track head as standard, 3/4wires(3phases) options.
- Built-in Track driver available.
- Beam angle:15/24/36/60°. IP22
- Top stable quality.

Order Model	Power Watt	Dimension mm	Dimension mm
GR-TL-10WC	10W	Φ80*50mm	Φ80*50mm
GR-TL-20WC	20W	Φ100*55mm	Φ100*55mm
GR-TL-30WC	30W	Φ120*65mm	Φ120*65mm



■ Zoomable & Shapable Track Light

- Available to change the shape of lighting.
- Track installation/Surface installation options, 1/3circuit options.

Order Model	GR-TL-7WT	GR-TL-10WT	GR-TL-15WT	GR-TL-20WT	GR-TL-30WT
Power	7W±5%	10W±5%	15W±5%	20W±5%	30W±5%
Size(mm)	Φ55*190	Φ55*190	Φ55*190	Φ55*210	Φ55*270




■ 2025 Newest Track Light

- Shorter body, latest popular high end. 110/220-240VAC 50/60Hz. 15/24/36° beam angle.
- Track head built in track rail, very stylish for high end shops.1/3phases options.

Order Model	GR-TL-10WF-6	GR-TL-12WF-6	GR-TL-20WF-6	GR-TL-30WF-6
Power	10W±5%	12W±5%	20W±5%	30W±5%
Size(mm)	Φ55xL50mm	Φ65xL60mm	Φ85xL50mm	Φ105xL50mm



■ Accessories for Track Light




2 wires Track



3 wires Track



4 wires Track



6 wires Track




Feature

- Philips/LiFud/Eagleries driver brand as standard. 2/3/5Years warranty
- Philips /Bridgelux SMD Chips, CRI>80 or 90, SDCM<3, 100-140LM/W
- Recessed/Suspension/Surface/Clips installation options
- Triac/0-10V/DALI dimmable/Emergency kits/Zigbee smart available.

■ Back-Lit Panel Light

- Stronger Metal bottom , thickness >0.25mm, or 0.3mm. IP44.CCT tunable by dial switch options
- The chassis adopts spray painting technology, which is resistant to high temperature and yellowing



Order Model	GR-PL3030-18WD	GR-PL6030-20WD	GR-PL6060-40WD	GR-PL12030-40WD	GR-PL12060-80WD
Wattage	18W	20W	36/40W/50W	40W/50W	50W/60W/72W/80W
Size(mm)	295*295*32	595*295*32	595*595*32	1195*295*32	1195*595*32

■ Waterproof Backlit LED Panel Light



- Metal bottom thickness: 0.6mm, strongest process by manually.
- Flat Aluminum frame, highest commercial level. IP65 waterproof



Order Model	GR-PL3030-18WB	GR-PL6030-24WB	GR-PL6060-40WB	GR-PL12030-40WB	GR-PL12060-72WB
Wattage	18W	20W	40W	40W	72W
Size(mm)	295*295*31	595*295*31	595*595*31	1195*295*31	1195*595*31

■ Surface LED Panel Light

- IP44 as standard, / IP65 waterproof is options
- Integrated surface frame, brigelux/philips chips, 100lm/w. CRI80/90. 110/220-240VAC.



Order Model	GR-PL6030-24WF	GR-PL6060-40WF	GR-PL12030-40WF	GR-PL12060-72WF
Wattage	20W	40W	40W	72W
Size(mm)	600*300*39	600*600*39	1200*300*39	1200*600*39

■ Grille LED Panel Light

- White finished as standard; black options
- Recessed type as standard; Surface mounted available




Order Model	GR-PL6060-40WH-A	GR-PL6060-40WH-B	3R-PL6060-40WH-C
Wattage	40W	40W	40W
Size(mm)	595*595mm	595*595mm	595*595mm


Feature

- LiFud/Eagleries driver brand as standard. 200/240VAC 50/60Hz.
- Philips /Bridgelux SMD Chips, CRI>80 or 90, SDCM<3, 100-140LM/W
- Triac/0-10V/DALI dimmable available.

■ Continuous Pendant Linear Light

- Beam angle: 120°, white/black finished optional.
- Seamlessly connection one by one.



Order Model	GR-L5070-60	GR-LS-5070-120	GR-LS5070-150	GR-LS5070-240
Wattages	18W	36W-40W	44W	72W-80W
Dimension	L585*W50*H70	L1185*W50*H70	L1485*W50*H70	L2390*W50*H70


■ Continuous Recessed Linear Light

- Beam angle: 120°, white/black finished optional
- Source: Osram/Bridgelux SMD CRI80 100-129lm/w



Order Model	GR-LS-5035-120	GR-LS-5035-150	GR-LS-5035-240	GR-LS-6535-120	GR-LS-6535-150
Wattages	36W	44W	72W	36W	44W
Cutout (mm)	L1180*W42	L1478*W42	L2378*W42	L1178*W52	L1478*W52


■ Combination Pendant Linear Light

- Beam angle: 120°+ 24°, white/black finished optional
- Source: Osram/Bridgelux SMD CRI80 100-129lm/w. 110/220-240VAC 50/60Hz.



Order Model	GR-LS6636-36W
Wattage	36W
Dimension	L1065*W33*H66

■ Round Pendant Linear Light

- Beam angle: 320°, aluminum+PC cover
- Source: Bridgelux SMD CRI80 100-129lm/w. 110/220-240VAC 50/60Hz




Order Model	GR-LS60-120	GR-LS60-150
Wattages	36W	45W
Dimension	Ø60*L1200	Ø60*L1500



■ Top Weatherproof led batten

- Beam angle: 120°; PC Bottom+PC Cover. LiFud/Eagleries/Osram driver options, 110/220-240VAC
- Source: Osram/Bridgelux SMD CRI80 100-130lm/w. Radar sensor/Emergency kits options.



Order Model	GR-TP-2F2A	GR-TP-4F1A	GR-TP-4F2A	GR-TP-5F1A	GR-TP-5F2A	GR-TP-6F2A
Wattage	18W-20W	20W	36W-40W	30W	50WW	60W
Size(mm)	L600*W82*H72	L600*W82*H72	L1200*W82*H72	L1200*W82*H72	L1500*W82*H72	L1500*W82*H72



■ Weatherproof led batten with T8 LED Tube

- Beam angle: 120°; ABS Bottom+PC cover. constant current driver for T8 LED Tube with aluminum body.
- Source: T8 led tube light 100-120lm/w



Order Model	GR-TP-2F1B	GR-TP-2F2B	GR-TP-4F1B	GR-TP-4F2B	GR-TP-5F1B	GR-TP-5F2B
Wattage	1* 9W led T8	2* 9W led T8	1* 18W led T8	2* 18W led T8	1* 22W led T8	2* 22W led T8
Size(mm)	L665*W75*H86	L665*W113*H86	L1265*W75*H86	L1265*W113*H86	L1565*W75*H86	L1565*W113*H86




■ New Weatherproof led batten

- Beam angle: 120°; IP65; PF>0.9, lumens can be 140lm-160lm/W output.
- Plastic body, available to do linkable series. Constant current driver, stable quality.



Order Model	GR-TP-2F2S	GR-TP-3F2S	GR-TP-4F2S
Wattage	24W	30W	36W
Size(mm)	L656*W45*H42	L956*W45*H42	L1258*W45*H42



IP65 Plastic led batten

Model	Length	Wattage
GR-2F2U	600mm	18W
GR-4F2U	1200mm	36W
GR-5F2U	1500mm	44W



Aluminum body T8 LED Tube

Model	Length	Wattage
GR-T8600-9W	600mm	9W
GR-T81200-18W	1200mm	18W
GR-T81500-22W	1500mm	22W



IP44 dustproof batten

Model	Length	Wattage
GR-TP-2F2L	600mm	18W
GR-TP-4F2L	1200mm	36W
GR-TP-5F2L	1500mm	44W



Feature

- Philips/LiFud/Eagleries driver brand as standard. PF>0.5 or 0.9; 2/3/5Years warranty
- Philips /Bridgelux SMD Chips, CRI>80 or 90, SDCM<3, 100-140LM/W
- Triac/0-10V/DALI dimmable/Emergency kits/Zigbee smart available. 3CCT & Wattages selectable options.

Hot sale Anti Glare downlight

- Beam angle 90°; IP44-54 for front. commercial level at good price.
- Deep reflector low glare value UGR<15; Gold/Shining silver/White/Black reflector options. White/black body options.



Order Model	GR-DL-7WA	GR-DL-9WA	GR-DL-12WA	GR-DL-15WA	GR-DL-18WA	GR-DL-24WA	GR-DL-30WA
Size(mm)	Ø79*36	Ø93*H45	Ø112*H52	Ø135*H60	Ø162*H72	Ø192*H83	Ø225*H97
Output(mm)	Ø65-70	Ø75-80	Ø95-100	Ø115-120	Ø140-145	Ø170-175	Ø195-205

Top Newest downlight

- Beam angle: 15°24°36°60° options. IP44; Bridgelux /Osram/CITIZEN COB, CRI>90
- Deep reflector low glare value UGR<15; Matt silver/Shining silver/White/Black reflector options



Order Model	GR-DL-15WB-9	GR-DL-25WB-9	GR-DL-35WB-9	GR-DL-40WB-9	GR-DL-50WB-9
Size(mm)	Ø115*60	Ø136*H70	Ø162*H80	Ø195*H95	Ø220*H105
Output(mm)	Ø105	Ø125	Ø150-155	Ø175-180	Ø205

Commercial downlight

- Beam angle: 24°36° for COB; 60° with SMD Chips options. IP44; Bridgelux /Osram, CRI>90
- Deep reflector low glare value UGR<15; White/Black reflector options. Commercial level at good price.



Order Model	GR-DL-7WB-5	GR-DL-10WB-5	GR-DL-15WB-5	GR-DL-20WB-5	GR-DL-25WB-5
Size(mm)	Ø62*H45	Ø82*H54	Ø102*H62	Ø130*H70	Ø130*H70
Output(mm)	Ø55	Ø75	Ø90-95	Ø115-120	Ø115-120

High Power Commercial downlight

- Beam angle: 15°24°36°50° options. IP44; Bridgelux /Osram/CITIZEN COB, CRI>90
- Deep reflector low glare value UGR<15; Gold/Shining silver/White/Black reflector options. White/black body options.



Order Model	GR-DL-30WS	GR-DL-35WS	GR-DL-40WS	GR-DL-50WS
Size(mm)	Ø160*85	Ø185*H95	Ø185*H95	Ø215*H110
Output(mm)	Ø145-150	Ø160-175	Ø160-175	Ø195-205

■ Recessed downlight

- Beam angle: 50°. IP44; Bridgelux /Osram/CITIZEN COB, CRI>90
- Deep reflector low glare value UGR<15.Philips/Osram/LiFud driver.110/220-240VAC 50/60Hz



Order Model	GR-DL-10WX	GR-DL-15WX	GR-DL-20WX	GR-DL-30WX	GR-DL-40WX	GR-DL-45WX	GR-DL-60WX
Size(mm)	Ø90*60	Ø115*H70	Ø140*H80	Ø165*H90	Ø195*H100	Ø230*H100	Ø230*H100
Output(mm)	Ø75	Ø95-100	Ø120-125	Ø140-150	Ø170-175	Ø205	Ø205

■ Classic downlight (Max 9-10inch)

- COB as standard, it is ok to do it with SMD Chips.110/220-240VAC 50/60Hz
- Beam angle: 120°. IP20; Bridgelux /Osram/CITIZEN Chip, CRI>90



Order Model	GR-DL-15WN	GR-DL-20WN	GR-DL-30WN	GR-DL-40WN	GR-DL-40WN-9	GR-DL-40WN-10
Size(mm)	Ø145*H60	Ø160*H60	Ø190*H60	Ø230*H75	Ø250*H75	Ø300*H110
Output(mm)	Ø120-125	Ø140-145	Ø165-170	Ø205-210	Ø210-230	Ø240-280

■ Low Profile Deep Downlight

- Height is less than 50mm, working for low profile.110/220-240VAC 50/60Hz
- Beam angle: 120°. IP44; White/black reflector options



Order Model	GR-DL-10WB-3	GR-DL-15WB-3	GR-DL-18WB-3	GR-DL-20WB-3	GR-DL-24WB-3	GR-DL-30WB-3
Size(mm)	Ø82*H38	Ø103*H40	Ø130*H44	Ø160*H40	Ø230*H40	Ø230*H40
Output(mm)	Ø75	Ø95	Ø120	Ø140-150	Ø200-215	Ø200-215

■ Competitive Deep Downlight

- IP44, competitive in price and quality.
- Beam angle: 90/120°.Deep design with low glare value.110/220-240VAC 50/60Hz



Order Model	GR-DL-7WA-1	GR-DL-12WA-1	GR-DL-15WA-1	GR-DL-18WA-1	GR-DL-24WA-1
Size(mm)	Ø95*H45	Ø115*H48	Ø138*H56	Ø170*H62	Ø170*H62
Output(mm)	Ø75-80	Ø95-100	Ø120-125	Ø150-155	Ø150-155

■ GR-DL-A-04 Deep Downlight

- IP44, competitive in price and quality.
- Beam angle: 90°.Deep design with low glare value.UGR<15.110/220-240VAC 50/60Hz




Order Model	GR-DL-7WA-4	GR-DL-15WA-4	GR-DL-18WA-4	GR-DL-24WA-4
Size(mm)	Ø85*H45	Ø138*H64	Ø138*H64	Ø185*H79
Output(mm)	Ø75-80	Ø120-125	Ø120-125	Ø160-175





CE RoHS



Feature

- Philips/LiFud/Eagleries driver brand as standard. PF>0.5 as standard, 0.9PF options. 3/5Years warranty
- Bridgelux/Osram Chips, CRI>80 or 90, SDCM<3, 100-140LM/W
- Triac/0-10V/DALI dimmable/Emergency kits/Zigbee smart available.

■ **2025 Newest deep downlight**


- Beam angle:24/36°, IP44, Bridgelux/Osram COB. CRI90. 90lm/W.
- Black/White/Gold body options, and white /black reflector options. 110/220-240VAC 50/60Hz




Order Model	GR-DL-7WG-5	GR-DL-10WG-5	GR-DL-12WG-5	GR-DL-18WG-5	GR-DL-20WG-5
Wattages	7W	10W	12W	15W-18W	20W-24W
Size(mm)	Ø62*H75	Ø72*H78	Ø82*H87	Ø95*H87	Ø105*H100
Size(mm)	Ø55	Ø65	Ø75	Ø85	Ø95

■ **Super Anti glare small hole spotlight**

- Beam angle: 24°/36°; Black/white finished; UGR<6, super anti glare. IP44
- LiFud/Eagleries/Philips driver, 220-240VAC.

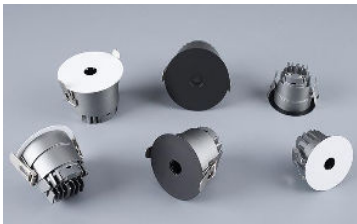

Order Model	GR-DL-5WG-0	GR-DL-8WG-0	GR-DL-10WG-0	GR-DL-12WG-0
Wattages	5W	7W-8W	9W-10W	12W-15W
Size(mm)	Ø65*H51	Ø75*H59	Ø85*H59	Ø105*H62
Output(mm)	Ø55	Ø65	Ø75	Ø95

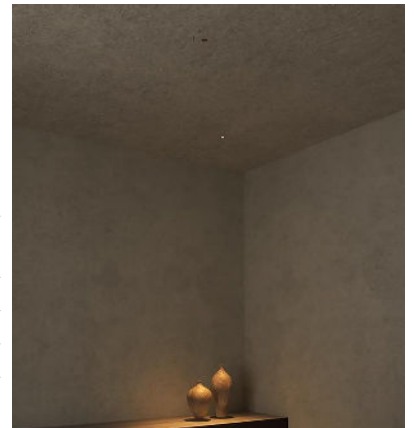


■ **Trimless LED Downlight**

- Beam angle:120°. 110/220-240VAC 50/60Hz
- IP20 (IP44 front), White and black body options.



Order Model	GR-DL-9WF	GR-DL-12WF	GR-DL-18WF	GR-DL-24WF
Output(mm)	Ø75*H42mm	Ø95*H48mm	Ø125*H63mm	Ø145*H68mm



■ **Popular downlight(2.5inch-6inch)**

- IP20 (IP54 front), competitive in price and quality.
- Beam angle: 120°. Classic design for projects. 110/220-240VAC 50/60Hz



Order Model	GR-DL-7WE	GR-DL-9WE	GR-DL-12WE	GR-DL-15WE	GR-DL-18WE	GR-DL-24WE
Size(mm)	Ø108*H45	Ø118*H48	Ø138*H50	Ø180*H55	Ø180*H55	Ø195*H55
Output(mm)	Ø80-90	90-95	Ø115-120	Ø150-169	Ø150-160	Ø160-175

■ 2025 Newest deep downlight

- 24°/55°; Black/white reflector: UGR<15,super anti glare.IP44 for front.
- Black/White/Gold/shining silver reflectors options.110/220-240VAC 50/60Hz



Order Model	GR-DL-12WB-7	GR-DL-15WB-7	GR-DL-20WB-7	GR-DL-30WB-7
Wattages	9W-12W	15W	18W-20W	30W
Size(mm)	Ø84*H56	Ø108*H65	Ø108*H65	Ø132*H76
Output(mm)	Ø75	Ø95-100	Ø95-100	Ø115-125



■ Deep Downlight

- Beam angle:15/24/36°options.different color reflector options
- White/Black trim options.Super anti glare.Bridgelux/Osram COB chips.



Order Model	GR-DL-7WA-8	GR-DL-10WA-8	GR-DL-15WA-8	GR-DL-18WA-8	GR-DL-25WA-8
Size(mm)	Ø65*H55	Ø85*H80	Ø101*H95	Ø101*H95	Ø118*H120
Output(mm)	Ø55	Ø75	Ø90-95	Ø90-95	Ø105-110

■ Adjustable Deep Downlight

- Beam angle:15/24/36/60°options. White/black housing options
- Adjust 30°.Super anti glare.Bridgelux/Osram COB chips.110/220-240VAC 50/60Hz



Order Model	GR-DL-10WG-4	GR-DL-12WG-4	GR-DL-15WG-4	GR-DL-20WG-4	GR-DL-30WG-4
Size(mm)	Ø85*H90mm	Ø85*H90mm	Ø105*H107	Ø105*H107	Ø130*H125
Output(mm)	Ø55	Ø75	Ø95	Ø75	Ø95

■ Adjustable Deep Spotlight

- Beam angle:15/24/36° options. UGR<13.Bridgelux/Osram COB chips.SDCM<3
- White/ Black body option,IP42 .LiFud/Eaglerise/Philips driver 220-240VAC



Order Model	GR-DL-7WG-9	GR-DL-12WG-9	GR-DL-18WG-9	GR-DL-30WG-9	GR-DL-40WG-9
Size(mm)	Ø65*H65	Ø87*H78	Ø108*H93	Ø139*H123	Ø150*H143
Output(mm)	Ø55	Ø75	Ø95	Ø125	Ø140

■ IP44 OR IP65 Deep Downlight

- Beam angle:15/24/36°/55° options. UGR<13.Bridgelux/Osram COB chips.SDCM<3
- including IP44 and IP65 .LiFud/Eaglerise/Philips driver 220-240VAC




Order Model	GR-DL-7WB-6	GR-DL-12WB-6	GR-DL-15WB-6
Size(mm)	Ø60*H55	Ø82*H75	Ø105*H95
Output(mm)	Ø55	Ø75	Ø95



IP65 High Lumens Downlight

- with special lens, the lumen can be 120lm/W output.
- IP54 waterproof for wet area available. Beam angle:60°;White/Black options.110/220-240VAC 50/60Hz



Order Model	GR-DL-15WB-2	GR-DL-20WB-2	GR-DL-25WB-2	GR-DL-30WB-2	GR-DL-40WB-2
Size(mm)	Ø83*H65	Ø103*H70	Ø132*H75	Ø160*H80	Ø180*H85
Outcut(mm)	Ø75	Ø95	Ø125	Ø150	Ø170



2025 New Top Waterproof Downlight

- DNF waterproof driver or LiFud/Eagleries driver . 220-240VAC 50/60Hz
- Beam angle:24°/55°options.Bridgelux/Osram COB chips.UGR<15
- Black/White/ gun black/ shining silver/ Matt silver reflector options



Order Model	GR-DL-12WW-5	GR-DL-15WW-5	GR-DL-20WW-5	GR-DL-25WW-5
Size(mm)	Ø90*H50	Ø110*H58	Ø110*H58	Ø135*H65
Outcut(mm)	Ø75	Ø95	Ø95	Ø115-120



Square Waterproof Downlight

- DNF waterproof driver or LiFud/Eagleries driver . 220-240VAC 50/60Hz
- IP65. Beam angle:55°.Bridgelux/Osram chips,120lm/w.UGR<15
- Black/White/ gun black/ shining silver/ Matt silver reflector options



Order Model	GR-DL-12WW-7	GR-DL-15WW-7	GR-DL-20WW-7	GR-DL-30WW-7	GR-DL-40WW-7
Size(mm)	LW90*H60	LW110*H70	LW145*H75	LW165*H85	LW185*H92
Outcut(mm)	LW75	LW95	LW125	LW145	LW170



Waterproof Spotlight (Trim & Trimless option)

- Beam angle:15/24/36/50°.IP65 waterproof, trim and trimless option.110/220-240VAC 50/60Hz
- Black/White/Shining silver/Gold/ gun black/ rose gold reflector options



Order Model	GR-DL-7WW-2	GR-DL-10WW-2	GR-DL-15WW-2	GR-DL-20WW-2
Size(mm)	Ø63*H69	Ø85*H74	Ø110*H83	Ø110*H83
Outcut(mm)	Ø55	Ø75	Ø95	Ø95



IP65 Waterproof Deep Downlight

- Beam angle:55°.Deep white/black reflectors options,UGR<15.
- IP65 waterproof for wet area like toilets, washroom, balcony etc.110/220-240VAC 50/60Hz

Order Model	GR-DL-10WW-1	GR-DL-15WW-1	GR-DL-20WW-1	GR-DL-24WW-1
Size(mm)	Ø87*H72	Ø110*H82	Ø138*H100	Ø138*H100
Outcut(mm)	Ø75	Ø95	Ø120	Ø120





■ IP65 Waterproof downlight (COB/SMD)

- Beam angle:120°. SMD and COB options.110/220-240VAC 50/60Hz
- IP65 waterproof for wet area like toilets, washroom, balcony etc.



Order Model	GR-DL-7WW	GR-DL-12WW	GR-DL-15WW	GR-DL-20WW	GR-DL-30WW	GR-DL-40WW
Size(mm)	Ø95*H45	Ø115*H50	Ø145*H60	Ø160*H60	Ø190*H60	Ø230*H75
Output(mm)	Ø75	Ø95	Ø125	Ø145	Ø170	Ø205

■ Economic Adjustable Spotlights

- Beam angle:24/36°. Bridgelux COB chips, CRI90,220-240VAC 50/60Hz. Aluminum heat module+ metal frame.UGR<17 Antiglare.White/black body and reflector options
- The module is compatible with all frames- round, trimless, square, double, triple, four head frames. Eagleries/LiFud driver, Competitive price, MOQ:300-500PCS

 <p>GR-DL-9WG-P Ø83*H80mm Cutout:Ø75mm</p>	 <p>GR-DL-9WG-T Cutout:Ø75mm</p>	 <p>GR-DL-9WG-S LW90*H80mm Cutout:LW75mm</p>
---	---	---

 <p>GR-DL-2x9WE L168*W90mm Cutout:L155*W75</p>	 <p>GR-DL-3x9WE L250*W90mm Cutout:L240*W75</p>	 <p>GR-FM-9WA-P Ø90*H110mm</p>
--	--	--



■ Economic deep downlight

- Beam angle:60°. IP44 . Deep reflector, low glare
- White/black body and reflectors options, Eagleries driver.

Model	Beam angle	Dimension	Cutout
GR-DL-9WA-P	60°	Ø88*H52	Ø75mm




■ Economic Spotlights

- Beam angle:15/24/36/50°. adjustable 30°.IP22/44
- White/black body and reflector options. LiFud/eagleries driver 110/220VAC.

Model	Wattage	Dimension	Cutout	CRI
GR-DL-15WG-P	15W	Ø105*H100	Ø95mm	90-97
GR-DL-20WG-P	20W	Ø105*H100	Ø90mm	90-97



CE RoHS



Feature

- Philips/LiFud/Eagleries driver brand as standard.220/240VAC 50/60Hz.PF>0.5 as standard, 0.9PF options. 3/5Years warranty
- Bridgelux/Osram Chips, CRI>80 or 90, SDCM<3, 100-140LM/W
- Triac/0-10V/DALI dimmable/Emergency kits/Zigbee smart available.

Adjustable Spotlight (Trim & Trimless option)

- Beam angle:15/24/36°options. IP44. 110/220-240VAC 50/60Hz
- Adjustable design. White/Black/Silver/Gun Black reflectors options

Order Model	GR-DL-7WG-6	GR-DL-12WG-6	GR-DL-20WG-6	GR-DL-25WG-6
Wattages	5W-7W	10W-12W	15W-20W	25W
Size(mm)	Ø62*H70	Ø83*H80	Ø105*H95	Ø130*H105
Outcut(mm)	Ø55	Ø75	Ø95	Ø115



Trim and Trimless options

Top Project Adjustable Spotlight

- Beam angle:15/24/36/50°.UGR<15.IP54 CRI90.110/220-240VAC 50/60Hz
- Black/White/Shining silver/Gold/ gun black/ rose gold reflector options

Order Model	GR-DL-7WG-3	GR-DL-9WG-3	GR-DL-12WG-3	GR-DL-15WG-3	GR-DL-20WG-3	GR-DL-30WG-3	GR-DL-50WG-3
Size(mm)	Ø61*H82	Ø72*H82	Ø82*H81	Ø93*H102	Ø103*H106	Ø140*H162	Ø160*H162
Outcut(mm)	Ø55	Ø65	Ø75	Ø85	Ø95	Ø120-125	Ø140-145



30W/40W/50W

Replaceable reflector spotlight

- Beam angle:15/24/36/50°options. White/black housing options. 110/220-240VAC.
- Adjust 30°.The reflector is replaceable without tool. Bridgelux /Osram COB, CRI90-97.

Order Model	GR-DL-8WG-5	GR-DL-10WG-5	GR-DL-12WG-5	GR-DL-15WG-5	GR-DL-20WG-5
Size(mm)	Ø62*H80mm	Ø85*H83mm	Ø85*H83	Ø108*H115	Ø108*H115
Outcut(mm)	Ø55	Ø75	Ø75	Ø96	Ø95



GR-DL-1WML (Fixed)-15/25/45°

Voltage	Dimension	Cutout
220-240VAC	Ø22*H26	Ø18mm



GR-DL-3WMA(Fixed)-25°

Voltage	Dimension	Cutout
220-240VAC	Ø38*H28	Ø30mm



3W/GR-DL-3WME-Adjustable

Voltage	Dimension	Cutout
220-240VAC	Ø45*H50	Ø40mm

■ Square Spotlight (Trim & Trimless option)

- Beam angle:15/24/36/50°,IP44, trim and trimless option.110/220-240VAC 50/60Hz
- Black/White/Shining silver/Gold/ gun black/ rose gold reflector options



Trimless type

Order Model	GR-DL-7WV	GR-DL-12WV	GR-DL-15WV	GR-DL-20WV
Wattages	5W-7W	10W-12W	15W	18W-20W
Size(mm)	LW65*H95mm	LW85*H106mm	LW85*111mm	LW105*105mm
Output(mm)	Ø55	Ø75	Ø75	Ø95

■ Slim Square LED Downlight

- Beam angle:120°,IP44. Osram SMD Chips, top quality for projects.110/220-240VAC 50/60Hz
- White/black body options. Black/White/Shining silver/Gold/ gun black/ rose gold reflector options



Order Model	GR-DL-9WB-8	GR-DL-12WB-8	GR-DL-15WB-8	GR-DL-20WB-8	GR-DL-25WB-8	GR-DL-35WB-8
Size(mm)	LW100*H43	LW120*H43	LW150*H43	LW175*H45	LW197*H50	LW230*H55
Output(mm)	75*75	95*95	125*125	155*155	175*175	200*200

■ Adjustable Square Downlight

- Adjustable body 30°. white/black housing options. 110-240VAC 50/60Hz.
- Beam angle:24/36°; Bridgelux/Osram COB, CRI90-97. 100lm/W output.



Order Model	GR-DLG-10WE	GR-DLG-15WE	GR-DLG-20WE
Size(mm)	L125*W125	L145*W145	L185*W185
Output(mm)	L105*W105	L125*W125	L160*W160

■ GR-DL-G-7 Series LED Downlight

- Beam angle:15/24/36°,IP44.110/220-240VAC 50/60Hz
- 30°adjustable. deep desgin, Black/White/Shining silver/ gun black/ rose gold reflector options



Order Model	GR-DL-10WG-7	GR-DL-15WG-7	GR-DL-20WG-7	GR-DL-24WG-7	GR-DL-12WG-7	GR-DL-12WG*2
Size(mm)	Ø85*H60mm	Ø110*H80mm	Ø140*H90mm	Ø140*H90mm	L85*W85*H60	L169*W85H60
Output(mm)	Ø75mm	Ø95mm	Ø125mm	Ø125mm	L75*W75mm	L160*W75mm
Shape	Round	Round	Round	Round	Square	Rectangle



■ Recessed Linear LED Spotlight(Fix)

- Beam angle:15/24/36°,IP44, 2W/Led chips.Bridgelux SMD chips, 100lm/w.CRI80/90
- Black/White body, and white /black reflector options. DALI/0-10V dimmable options.110/220-240VAC 50/60Hz

Order Model	GR-DL-2WL-1	GR-DL-4WL-1	GR-DL-6WL-1	GR-DL-10WL-1	GR-DL-20WL-1	GR-DL-30WL-1
Wattages	2W	4W	6W	9W-10W	18W-20W	27W-28W
Size(mm)	LW45*H47	L68*W45*H47	L95*W45*H47	L145*W45*H39	L280*W45*H39	L415*W45*H39
Output(mm)	L38*W38	L60*W38	L85*W38	L138*W38	L270*W38	L405*W38

■ Recessed Linear LED Spotlight(Adjustable)

- Beam angle:15/24/36°,IP44, 2W/Led chips. Adjustable design.Bridgelux SMD chips, 100lm/w.CRI80/90
- Black/White body, and white /black reflector options. DALI/0-10V dimmable options



Order Model	GR-DL-10WL-2	GR-DL-20WL-2	GR-DL-30WL-2
Wattages	9W	18W-20W	27W-28W
Size(mm)	LW45*H47	L68*W45*H47	L95*W45*H47
Output(mm)	L38*W38	L60*W38	L85*W38



■ Trimless Linear LED Spotlight

- Beam angle:15/24/36°,IP44, 2W/Led chips. Adjustable design.Bridgelux SMD chips, 100lm/w.CRI80/90
- Black/White body, and white /black reflector options. DALI/0-10V dimmable options.110/220-240VAC 50/60Hz



Order Model	GR-DL-10WL-3	GR-DL-20WL-3	GR-DL-30WL-3	GR-DL-60WL-3
Wattages	10W	20W	30W	40W-60W
Size(mm)	L140*105*H42	L273*105*H42	L540*105*H42	L1203*105*H42
Output(mm)	L145*W50	L275*W50	L545*W40	L1205*W50



■ Surface Linear LED light(Fix)

- Beam angle:15/24/36°for spotlights, 120°for linear profile lights.IP44, 100lm/w.CRI80/90
- Black/White body, and white /black reflector options.110/220-240VAC 50/60Hz



Order Model	GR-DL-10WL-4	GR-DL-20WL-4	GR-DL-30WL-4
Wattages	10W	20W	30W
Size(mm)	141*34*57	273*34*57	414*34*57



Track installation option



Grid downlight fixture



Feature

- Philips/LiFud/Eagleries driver brand as standard.220/240VAC 50/60Hz.PF>0.5 as standard, 0.9PF options. 3/5Years warranty
- Bridgelux/Osram Chips, CRI>80 or 90, SDCM<3, 100-140LM/W
- Triac/0-10V/DALI dimmable/Emergency kits/Zigbee smart available.

■ GR-DLG-A Grille Downlight (Fixed)

- Beam angle:24/36°,IP22. available to be with honeycomb.
- Black/White/silver reflector options.110/220-240VAC 50/60Hz



Order Model	GR-DLG-10WA	GR-DLG-10WA*2	GR-DLG-10WA*3
Wattages	10W-12W	10W*2	10W*3
Size(mm)	LW85*H68	L168*W85	L256*W85
Output(mm)	LW75	L160*W75	L245*W75

■ GR-DLG-E Grille Downlight (Adjustable)

- Beam angle:15/24/36°,IP20.adjustable 30°.110/220-240VAC 50/60Hz
- Black/White Body options. Bridgelux/Osram COB chips,100lm/W,CRI90.



Order Model	GR-DLG-10WE*2	GR-DLG-15WE*2	GR-DLG-20WE*2	GR-DLG-10WE*3	GR-DLG-15WE*3	GR-DLG-20WE*3
Wattages	10W*2	15W*2	20W*2	10W*3	15W*3	20W*3
Size(mm)	L225*W130	L255*W145	L330*W180	L325*W130	L365*W145	L430*W165
Output(mm)	L205*W115	L240*W125	L315*W165	L310*W115	L325*W125	L415*W145

■ GR-DLG-F Grille Downlight (Pull in & Out)

- Beam angle:15/24/36°,IP20.Put in & Out and 360° rotation.
- Bridgelux/Osram COB chips,100lm/W,CRI90.110/220-240VAC 50/60Hz



Order Model	GR-DLG-7WF	GR-DLG-15WF	GR-DLG-20WF	GR-DLG-25WF	GR-DLG-7WF*2	GR-DLG-15WF*2	GR-DLG-20WF*2
Wattages	7W	15W	20W	25W	7W*2	15W*2	20W*2
Size(mm)	Ø90*H80	Ø115*H105	Ø135*H125	Ø165*H125	L170*W90	L210*W115	L250*W140
Output(mm)	Ø75	Ø95	Ø125	Ø150	L155*W75	L190*95	L235*W120

■ Long Cylinder Recessed Downlight (Adjustable)

- Beam angle:24°, CRI90. 100-240VAC 50/60Hz
- Black/White body, 360° rotation.



Order Model	GR-DL-5WC100	GR-DL-5WC200	GR-DL-5WC300
Wattages	5W	5W	5W
Size(mm)	Ø65*L100	Ø65*L200	Ø65*L300
Output(mm)	Ø58-60	Ø58-60	Ø58-60



■ Classic Surface Grille Downlight

- Beam angle:24/36°,IP20, 100lm/w.CRI80/90
- 30° adjustable, Black/White body, .110/220-240VAC 50/60Hz



Order Model	GR-DLG-10WK	GR-DLG-15WK	GR-DLG-20WK	GR-DLG-10WK*2	GR-DLG-15WK*2	GR-DLG-20WK*2
Wattages	10W	15W	20W-25W	10W*2	15W*2	20W-25W*2
Size(mm)	LW100*H100	LW115*H140	LW150*H180	L200*W100	L230*W115	L300*W150

■ Slim Surface Grille Downlight

- Beam angle:15/24/36°,IP20, Bridgelux/Osram COB 100lm/w.CRI90
- Black/White body, and white /black reflector options.Eagleries driver,220-240VAC



Order Model	GR-DLG-10WL	GR-DLG-10WL*2	GR-DLG-10WL*3	GR-DLG-10WL*4
Wattages	10W	10W*2	10W*3	10W*4
Size(mm)	115*115*55	223*115*55	328*115*55	225*225*55

■ Gimbal Grille Downlight

- Beam angle:15/24/36°,
- Black/White body, and white /black reflector options.110/220-240VAC 50/60Hz



Order Model	GR-DLG-12WG*2 (Round)	GR-DLG-12WG*2(Square)
Wattages	12W*2	12W*2
Size(mm)	L220*W85*H90	L220*W85*H90



■ Gimbal Grille Downlight

- Beam angle:15/24/36°,IP20, 100lm/w.CRI90, Bridgelux/Osram COB,
- Black/White body, avialble to be 360° rotation+ 30° adjustable light direction.110/220-240VAC 50/60Hz



Order Model	GR-DLG-10WH	GR-DLG-10WH*2	GR-DLG-10W*4
Wattages	10W	10W*2	10W*4
Size(mm)	LW105*H100	L205*W105	LW220*125





■ Surface LED Spotlight (GR-FM-B)

- Beam angle: 60°. IP20-IP44, 110/220-240VAC 50/60Hz
- White/black body options. Surface mount/Pendant mount options.

Order Model	GR-FM-12WB	GR-FM-15WB	GR-FM-20WB	GR-FM-30WB
Size(mm)	Ø75*H130	Ø95*H150	Ø115*H160	Ø140*H160
Wattages	10W-12W	15W	20W	30W



Suspension



■ Surface LED Spotlight (GR-FM-A)

- Beam angle: 15/24/36°. IP20-IP44, White/black body options. 110/220-240VAC 50/60Hz
- Black/White/Shining silver/Gold/ gun black/ rose gold reflector options

Order Model	GR-FM-7WA	GR-FM-10WA	GR-FM-12WA	GR-FM-15WA	GR-FM-20WA
Size(mm)	Ø55*H120	Ø75*H150	Ø75*H150	Ø95*H150	Ø115*H160
Wattages	7W	10W	12W	15W	20W



Suspension option



■ Surface LED Spotlight (25W-60W)

- Beam angle: 24/36/60°. IP20-IP44, White/black body options
- Black/White/Shining silver/Gold/ gun black/ rose gold reflector options. 110/220-240VAC 50/60Hz

Order Model	GR-FM-25WA	GR-FM-30WA	GR-FM-35WA	GR-FM-45WA	GR-FM-60WA
Size(mm)	Ø120*H120	Ø140*H140	Ø160*H160	Ø160*H160	Ø190*H190
Wattages	25W	30W	35W	45W	60W



■ High Power Surface Downlight (50W-200W)

- Beam angle: 60°. IP20-IP44, White/black body options. Surface/Pendant options
- Bridgelux/Osram COB chips for 50W-80W, SMD for 100W-200W, 100LM/W Output.

Order Model	GR-FM-50WR	GR-FM-80WR	GR-FM-100WR	GR-FM-150WR	GR-FM-200WR
Size(mm)	Ø105*H95	Ø138*H95	Ø160*H105	Ø180*H110	Ø220*H120
Wattages	50W	70-80W	100W	150W	180W-200W



50W-80W



Waterproof Surface Downlight

- Beam angle:50°.IP65 waterproof for wet area.110/220-240VAC 50/60Hz
- Black/White body. Bridgelux/Osram chips, CRI90, 100LM/W Output.



Order Model	GR-FM-10WF	GR-FM-15WF	GR-FM-20WF	GR-FM-25WF	GR-FM-30WF	GR-FM-40WF	GR-FM-50WF
Size(mm)	Ø75*H118	Ø95*H128	Ø95*H128	Ø120*H150	Ø120*H150	Ø148*H180	Ø171*H200
Wattages	10W	15W	20W	25W	30W	40W	50W




Waterproof Surface Downlight

- Beam angle:50°.IP65 waterproof for wet area.110/220-240VAC 50/60Hz
- Black/White body. Bridgelux/Osram chips, CRI90, 100LM/W Output.



Order Model	GR-FM-10WH	GR-FM-15WH	GR-FM-25WH	GR-FM-30WH
Size(mm)	LW80*H83	LW100*H96	LW130*H123	LW150*H136
Wattages	10W	15W	20W or 25W	30W



GR-FM-D Square Surface Downlight

- Beam angle:24/36°.IP22 ,different color reflector options.110/220-240VAC 50/60Hz
- Black/White body. Bridgelux/Osram chips, CRI90, 100LM/W Output.



Order Model	GR-FM-7WD	GR-FM-10WD	GR-FM-12WD	GR-FM-15WD	GR-FM-20WD
Size(mm)	LW55*H80	LW75*H95	LW75*H130	LW95*H110	LW115*H110
Wattages	7W	10W	12W	15W	20W



GR-FM-E

- Beam angle:90°.IP20-IP44,White/black body options.110/220-240VAC 50/60Hz
- Bridgelux/Osram COB chips, CRI90-98, 100LM/W Output.

Order Model	GR-FM-10WE	GR-FM-15WE	GR-FM-20WE	GR-FM-24WE	GR-FM-30WE
Size(mm)	Ø105*H95	Ø138*H95	Ø160*H105	Ø180*H110	Ø220*H120
Wattages	10W	15W	20W	24W	30W



Suspended Long Cylinder Spotlight

- Beam angle:24°.IP44, Bridgelux COB.CRI90. 90lm/W.110/220-240VAC 50/60Hz
- Black/White/Gold bodyoptions, and white /black reflector options.The rope is 1.5m/pcs

Order Model	GR-DL-40300	GR-DL-40500	GR-DL-50300	GR-DL-50500	GR-DL-50700
Wattages	5W	5W	5W	5W	5W
Size(mm)	Ø40*H300	Ø40*H500	Ø55*H300	Ø55*H500	Ø55*H700



■ **Fold Surface Spotlight**

- Beam angle:15/24/36°.IP22
- Black/White body. Bridgelux/Osram chips, CRI90, 100LM/W Output.110/220-240VAC 50/60Hz


Order Model	GR-DL-10WZ-1	GR-DL-15WZ-1	GR-DL-20WZ-1	GR-DL-25WZ-1
Size(mm)	Ø60*H162	Ø76*H170	Ø82*H182	Ø82*H182
Wattages	10W	15W	20W	25W



■ **Fold Surface Spotlight**

- Beam angle:24°.IP22,white/black/gold reflector options
- Black/White body. Bridgelux/Osram chips, CRI90, 100LM/W Output.110/220-240VAC 50/60Hz

Order Model	GR-DL-7WZ-3	GR-DL-10WZ-3	GR-DL-15WZ-3	GR-DL-20WZ-3
Size(mm)	Ø60*H80	Ø76*H95	Ø87*H100	Ø110*H120
Wattages	7W	10W	15W	20W



■ **Fold Cylinder Downlight**

- Beam angle:15/24/36°.IP22 ,different color reflector options
- Black/White body. Bridgelux/Osram chips, CRI90, 100LM/W Output.110/220-240VAC 50/60Hz

Order Model	GR-DL-10WZ-3	GR-DL-15WZ-3	GR-DL-20WZ-3
Size(mm)	Ø60*H180	Ø60*H180	Ø75*H200
Wattages	10W	15W	20W



■ **Surface Downlight**

- Beam angle:120°.IP44 .110/220-240VAC 50/60Hz
- Metal body. Black/White body. Bridgelux/Osram chips, 100LM/W Output.available to be inside battery backup

Order Model	GR-FM-7WQ	GR-FM-9WQ	GR-FM-12WQ	GR-FM-18WQ	GR-FM-24WQ
Size(mm)	Ø105*H75	Ø138*H75	Ø160*H75	Ø178*H75	Ø230*H100
Wattages	7W-9W	9W-12W	12W-15W	18W	24W



■ **Economic Slim Surface Downlight**

- Beam angle:120°.IP22. Only 40mm height.110/220-240VAC 50/60Hz
- Metal body. Black/White body. Bridgelux/Osram chips, 100LM/W Output.including external constant current driver

Order Model	GR-FM-9WU	GR-FM-12WU	GR-FM-18WU	GR-FM-24WU	GR-FM-30WU
Size(mm)	Ø105*H40	Ø140*H40	Ø180*H40	Ø232*H40	Ø300*H42
Wattages	9W	12W	15W-18W	18W-24W	24W-30W





■ Indoor Slim Surface Ceiling Light (GR-CD-A)

- IP44 for front, IP20 for back.
- Metal bottom+ PP Cover.Beam angle:120°.100LM/W Output. 110/220-240VAC 50/60Hz

Order Model	GR-CD-12WA	GR-CD-18WA	GR-CD-24WA	GR-CD-36WA
Size(mm)	Ø280*H50	Ø320*H50	Ø380*H50	Ø450*H50
Wattages	12W	18W	24W	32-36W



■ Indoor Slim Surface Ceiling Light (Side-lighting)

- IP44 for front, IP20 for back.White/black/Silver frame options
- Metal base+ PP Cover.Beam angle:120°.100LM/W Output. 110/220-240VAC 50/60Hz

Order Model	GR-CD-12WB	GR-CD-18WB	GR-CD-24WB	GR-CD-30WB	GR-CD-36WB	GR-CD-42WB
Size(mm)	Ø230*H50	Ø270*H50	Ø300*H50	Ø350*H50	Ø390*H50	Ø480*H50
Wattages	12W	18W	24W	30W	36W	40W-42W



■ IP65 Slim Surface Ceiling Light (GR-CD-D)

- Beam angle:120°.IP65,90-100LM/W Output.
- Whole Plastic body.Available to be CCT tunable by switch on/off.110/220-240VAC 50/60Hz

Order Model	GR-CD-12WD	GR-CD-18WD	GR-CD-24WD	GR-CD-36WD
Size(mm)	Ø220*H50	Ø300*H50	Ø370*H50	Ø470*H50
Wattages	12W	18W-20W	24W-30W	36W-40W

■ IP65 Slim Surface Ceiling Light (Side-lighting)

- Beam angle:120°.IP65,90-100LM/W Output.110/220-240VAC 50/60Hz
- ABS Materials for bottom base and PP cover. White body as standard, black body options.



Order Model	GR-CD-12WF	GR-CD-18WF	GR-CD-24WF	GR-CD-36WF
Size(mm)	Ø180*H50	Ø220*H50	Ø300*H50	Ø400*H50
Wattages	12W	18W	24W	30W-36W



■ IP65 Surface Ceiling Light (GR-CD-H)

- Beam angle:120°.IP65,100LM/W Output.110/220-240VAC 50/60Hz
- Whole Plastic body.available to be motion sensor/ Emergency kits.



Order Model	GR-CD-12WH	GR-CD-15WH	GR-CD-18WH	GR-CD-24WH	GR-CD-30WH
Size(mm)	Ø275*H80	Ø275*H80	Ø275*H80	Ø325*H90	Ø325*H90
Wattages	12W	15W	18W	24W	30W



FORGET ABOUT MAINTENANCE



Feature

- SUNCOM/Philips/Meanwell/DONE/SOSEN/MOSO driver brand .100/220-265VAC 50/60Hz. 3/5Years warranty
- Surge protection 4-10KV, Lifetime >50000Hrs. PF>0.95. 150-180LM/W output philips chips.
- available to be 0-10V/DALI dimmable, Emergency kits, and radar sensor.

High Lumen Round High Bay (GR-HB-B)

- Beam angle:90/120°.IP65.110-265VAC 50/60Hz
- Philips chips 150-160lm/W; SUMCOM/PHILIPS Driver options. Emergency kits available



Order Model	GR-HB-100WB	GR-HB-150WB	GR-HB-200WB	GR-HB-240WB
Size(mm)	Ø250*H280	Ø300*H280	Ø345*H280	Ø400*280
Wattages	70W-100W	150W	200W	240W




High Lumen High Bay (GR-HB-E)

- Beam angle:90/120°.IP65.110-265VAC 50/60Hz
- Philips chips 150-160lm/W; SUMCOM/PHILIPS Driver options. Emergency kits available



Order Model	GR-HB-100WE	GR-HB-150WE	GR-HB-200WE	GR-HB-240WE
Size(mm)	Ø250*H280	Ø300*H280	Ø345*H280	Ø400*280
Wattages	70W-100W	150W	200W	240W



(100W-500W) High Bay (GR-HB-B-1)

- Beam angle:60°/90/120°.IP65. 150-200lm/W output.
- Available to be radar sensor type.110-265VAC 50/60Hz



Order Model	GR-HB-100WB-1	GR-HB-150WB-1	GR-HB-200WB-1	GR-HB-240WB-1	GR-HB-300WB-1	GR-HB-500WB-1
Size(mm)	Ø248*H175	Ø308*H175	Ø360*H175	Ø360*175	Ø360*H175	Ø360*175
Wattages	100W	150W	200W	240W	300W	500W



CCT & Watts Selectable High Bay

- Beam angle:60°/90/120°.IP65. 0-10V/DALI dimming options
- With dial switch to select CCT from 3000K to 6000K, select wattage from 100%-80%-60%.



Order Model	GR-HB-100WB-CCTGR-HB-150WB-CCTGR-HB-200WB-CCTGR-HB-240WB-CCT
Size(mm)	Ø248*H175 Ø308*H175 Ø360*H175 Ø360*175
Wattages	100W 150W 200W 240W





■ Linear High Bay (50W/Modular)

- Beam angle:60°/90°/70°*150°.IP65. **110-120lm/W** output.110-265VAC 50/60Hz
- 50W/Modular, 100W with 2modular, 150W with 3 modular....Surface/Pendant installation options



Order Model	GR-HB-50WL	GR-HB-100WL	GR-HB-150WL	GR-HB-200WL
Size(mm)	Ø248*H175	Ø308*H175	Ø360*H175	Ø360*175
Wattages	50W	100W	150W	200W



■ Panel High Bay

- Beam angle:120°.IP44. with Anti glare cover.
- single row and double row options.110-265VAC 50/60Hz



Order Model	GR-HB-6020L-6	GR-HB-6030L-6	GR-HB-12020L-6	GR-HB-12030L-6
Size(mm)	L600*W200	L600*W300	L1200*W200	L1200*W300
Wattages	50W-100W	100W-150W	150W-200W	200W-240W



■ Classic High Bay

- Beam angle:45°/60°/90°/120°.IP54.
- Philips chips 130-140lm/W; SUMCOM/PHILIPS Driver options.110-265VAC 50/60Hz

Order Model	GR-HB-100WM	GR-HB-150WM	GR-HB-200WM	GR-HB-240WM
Size(mm)	Ø350*H272	Ø350*H302	Ø350*H352	Ø350*H402
Wattages	100W	150W	200W	240W

■ Recessed High Bay (50W/Modular)

- Beam angle:60°/90°/70°*130° options. 100-265VAC 50/60Hz. IP65, PF>0.95
- Recessed installation for gas station, warehouses etc.Philips chips, 120-130lm/W.



Order Model	GR-HB-50WY	GR-HB-100WY	GR-HB-150WY	GR-HB-200WY	GR-HB-240WY
Size(mm)	L300*W115*H35	230*325*82mm	305*325*82mm	380*325*82mm	455*325*82mm
Outcut(mm)	L280*W76	217*298mm	292*298mm	367*298mm	442*298mm
Wattages	50W	100W	150W	200W	240W





Feature

- SUNCOM/Philips/Meanwell/DONE/SOSEN/MOSO driver brand 3/5Years warranty
- Surge protection 4-20KV, Lifetime >50000Hrs. PF>0.95.

■ New Led streetlight

- Aluminum body+PC lens+ Glass cover; IP66; 70°140°
- Source: philips SMD 110-140lm/w output.110-265VAC 50/60Hz



Order Model	GR-SL-100WD	GR-SL-120WD	GR-SL-150WD	GR-SL-180WD
Wattage	100W	120W	150W	180W
Size(mm)	490×246×80	570×290×80	570×290×80	570×290×80

■ Top Adjustable Led streetlight(Tool-free)

- Adjustable 90° joint: Tool free design with clip; Glass cover+ PC lens.Philips chips 150lm/W output
- Beam angle: 60°/90°/120°/T2M/T3M/T4M options. Cut off switch, SPD options.110-265VAC 50/60Hz



Order Model	GR-SL-50WH	GR-SL-100WH	GR-SL-150WH	GR-SL-200WH	GR-SL-300WH
Wattage	50W	80-100W	150W	200W-250W	300W

■ Modular LED Streetlight (50W/modular)

- Beam angle: 70°140°;IP66. Install dia:60-65mm.110-265VAC 50/60Hz
- 50W/modular,Philips SMD chips. 110-130lm/W output. PF>0.95, 4-10KV Surge protection.




Order Model	GR-SL-100WB	GR-SL-150WB	GR-SL-200WB	GR-SL-250WB	GR-SL-300WB	GR-SL-400WB
Wattage	100W	150W	200W	250W	300W	400W
Install dia	6-8m	7-9m	8-10m	10-12m	12-14m	14-18m

■ Competitive LED Street light

- Beam angle: 70°140°;IP65, install dia:60-65mm
- Source: philips SMD 100-120lm/w;PF>0.95,competitive solution for projects.110-265VAC 50/60Hz



Order Model	GR-SL-100WE	GR-SL-150WE	GR-SL-200WE
Wattage	100W	150W	200W
Size(mm)	450*290*80	520*290*80	600*290*80

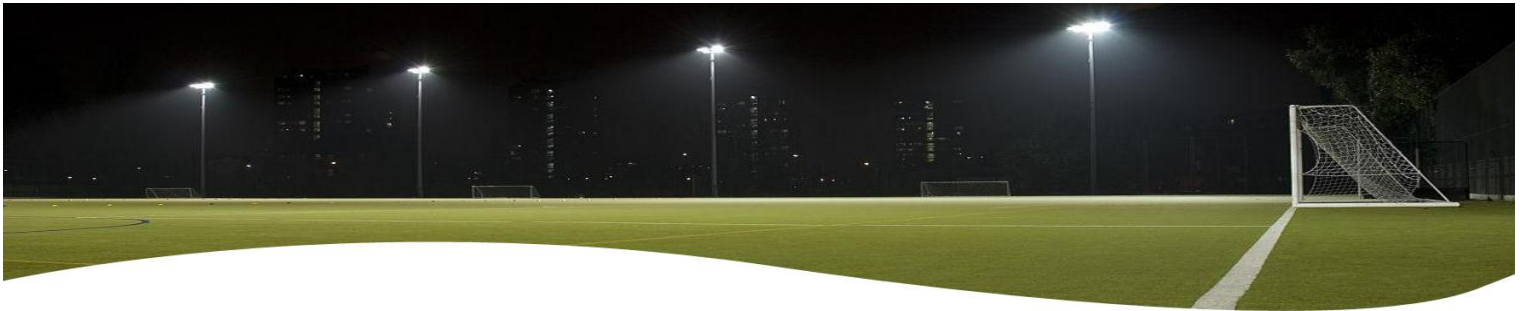

Feature

- SUNCOM/Philips/Meanwell/DONE/SOSEN/MOSO driver brand 3/5Years warranty
- Surge protection 4-20KV, Lifetime >50000Hrs. IK08.

■ 50W/Modular Flood Light(50W-500W)

- Beam angle: 60°/90°/70°/140°; IP66, PF>0.95.110-265VAC 50/60Hz
- 50W/Modular, 10 modular for 500Watt, Philips chips. 110-130lm/W output.



Order Model	GR-FL-50WM	GR-FL-100WM	GR-FL-150WM	GR-FL-200WM	GR-FL-250WM	GR-FL-300WM	GR-FL-400WM
Wattage	50W	100W	150W	200W	250W	300W	400W-500W
Size(mm)	W75*L315	W156*L315	W237*L315	W324*L315	W399*L315	W474*L315	324*610

■ 100W/Modular Floodlight

- Beam angle:90° as standard, 75°/145°options; 110-265VAC 50/60Hz
- 100W/Modular, Philips chips, 120-130lm/W output.IP66, PF>0.95. available to be with emergency kits



Order Model	GR-FL-100WE	GR-FL-200WE	GR-FL-300WE	GR-FL-400WE
Wattage	100W	200W	300W	400W
Size(mm)	229*370	310*370	391*370	472*370



■ 250W/Modular Stadium Floodlight

- Beam angle: 25/45/60/90°; IP66, PF>0.95.110-265VAC 50/60Hz
- 250W/modular, Philips chips 130-170lm/w; Anti-glare PC lens,low glare value. Shade cover options



Order Model	GR-FL-250WG	GR-FL-500WG	GR-FL-750WG	GR-FL-1000WG	GR-FL-1500WG	GR-FL-2000WG
Wattage	250W	500W	750W	1000W	1500W	2000W
Size(mm)	177*415*127	360*415*127	540*415*127	360*780*127	540*780*127	720*780*127



■ 500W/Modular Stadium Floodlight

- Beam angle: 15/30/45/60/90°; IP66, PF>0.95
- 500W/Modular, Philips chips 140-180lm/w.110-265VAC 50/60Hz



Order Model	GR-FL-500WH	GR-FL-1000WH
Wattage	500W	1000W
Size(mm)	640*360*220	650*650*230



■ Top Flood Light(50W-500W)

- Beam angle: 30°/60°/90°/T2/T3/T4/T5; IP66, PF>0.95. Moso driver.
- Glass cover+PC Lens, Lumileds chips, 150lm/W output. 110-265VAC 50/60Hz



Order Model	GR-FL-50WA	GR-FL-100WA	GR-FL-150WA	GR-FL-200WA	GR-FL-300WM	GR-FL-400WM	GR-FL-500WM
Wattage	50W	100W	150W	200W-240W	300W	400W	500W
Size(mm)	290*230*48	310*300*53	360*300*53	370*350*53	430*400*58	548*445*70	560*555*76

■ Classic Flood Light

- Beam angle: 120°; IP65, PF>0.95. Bridgelux SMD2835,100-120lm/W
- 100-240VAC 50/60Hz as standard, it is ok to do DC12V/24V/36V/48V/60VDC input type.



Order Model	GR-FL-20WA-1	GR-FL-30WA-1	GR-FL-50WA-1	GR-FL-100WA-1	GR-FL-150WA-1	GR-FL-200WA-1
Wattage	20W	30W	50W	100W	150W	200W
Size(mm)	290*230*48	310*300*53	360*300*53	370*350*53	430*400*58	548*445*70

■ DOB Flood Light

- Beam angle: 120°; IP65, Epistar chips,80-100lm/w.
- 100-240VAC 50/60Hz , without individual external driver, only for wholesale, MOQ 500PCS.



Order Model	GR-FL-30WO	GR-FL-50WO	GR-FL-100WO	GR-FL-150WO	GR-FL-200WO	GR-FL-300WO	GR-FL-400WO
Wattage	30W	50W	100W	150W	200W	300W	400W
Size(mm)	165*30*135	202*30*156	270*37*210	322*38*231	385*40*285	420*50*320	460*50*345

■ Solar Flood Light

- Beam angle: 120°; IP65, Bridgelux SMD2835,high brightness.2days duration.
- Aluminum body+Glass cover+ 6V Poly solar panel+3.2V LiFepo4 battery, including remote controller



Order Model	GR-FL-40WSF	GR-FL-60WSF	GR-FL-100WSF	GR-FL-200WSF	GR-FL-300WSF
LiFepo4	5000MAH	10000MAH	15000MAH	20000MAH	30000MAH
Solar Panel	6V 10W	6V 15W	6V 20W	25W	30W



■ Single Round Wall light

- Bridgelux COB, CRI90;90-100lm/W.
- Aluminum body+toughed glass, Grey finished, IP65; 30°



Order Model	GR-BD-7WP	GR-BD-9WP	GR-BD-15WP	GR-BD-20WP
Wattage	7W	9W-10W	15W	18W-20W
Size(mm)	Φ90*160MM	Φ108*200MM	Φ108*200MM	Φ145*200MM

■ Outdoor Up down Wall light

- Beam angle: 30°; IP65.
- Aluminum body+toughed glass cover, Grey/Black finished optional.110-265VAC 50/60Hz



Order Model	GR-BD-2x7WA	GR-BD-2x10WA	GR-BD-2x15WA	GR-BD-2x20WA
Wattage	2x7W	2x10W	2x15W	2x20W
Size(mm)	Φ90*H260	Φ108*H300	Φ108*H300	Φ145*H300

■ Rectangle Wall Light

- Source: Bridgelux smd CRI80, 90-100lm/W.
- Aluminum body+toughed glass cover,IP65 waterproof; 30°.110-265VAC 50/60Hz



Order Model	GR-BD-20T	GR-BD-30T	GR-BD-50T
Wattage	12W	18W	24W
Size(mm)	L200*W50*H80	L300*W50*H80	L500*W50*H80

■ High Power Wall Pack Light

- Source:Epistar SMD Chips,110-140lm/W;CRI80
- Aluminum body, Coffe finished , IP65.110-265VAC 50/60Hz



Order Model	GR-BD-50WP	GR-BD-70WP	GR-BD-100WP	GR-BD-120WP
Wattage	50W-60W	70W	100W	120W
Size(mm)	336*216*182	336*216*182	385*247*195	385*247*195



IP65 Adjustable Up down wall light
GR-BD-2x3WE (10*10*10CM)



Waterproof up down wall light
GR-BD-2x5WD Round/Square (GU10 option)



Single head wall light
GR-BD-5WF Round/Square(GU10 option)

■ Round Aluminum LED Bulkhead

- Source: Bridgelux SMD Chips, 100lm/W; CRI80
- Aluminum body, white/Black finished optional, IP65. 110-265VAC 50/60Hz



Order Model	GR-BD-12WR	GR-BD-15WR	GR-BD-18WR	GR-BD-24WR
Wattage	12W	15W	18W	24W
Size(mm)	Ø225*H90	Ø275*H100	Ø275*H100	Ø275*H100

■ Oval Alumium LED Bulkhead


- Source: Bridgelux SMD Chips, 100lm/W; CRI80
- Aluminum body, white/Black finished optional, IP65. 110-265VAC 50/60Hz



Order Model	GR-BD-12WT	GR-BD-15WT	GR-BD-18WT
Wattage	12W	15W	18W
Size(mm)	L225*W80*H90	L275*W80*H90	L275*W80*H90

■ Oval Alumium LED Bulkhead

- Source: Bridgelux SMD Chips, 100lm/W; CRI80
- Aluminum body, white/Black finished optional, IP65. 110-265VAC 50/60Hz



Order Model	GR-BD-30G	GR-BD-40G	GR-BD-60G	GR-BD-80G	GR-BD-100G	GR-BD-120G	GR-BD-150G
Wattage	6W	9W	12W	15W	20W	25W	28W
Size(mm)	L300*W80*H50	L400*W80*H50	L600*W80*H50	L800*W80*H50	1000*W80*H50	1200*W80*H50	1500*W80*H50



IP65 Square recessed wall light
GR-BD-L-03 / 3W 100-240VAC 50/60Hz
L86*W86mm, Cutout:80*80mm



Rectangle wall light IP65
GR-BD-L-02 / 5W 100-240VAC 50/60Hz
L210*W60*H55mm, Cutout:205*55mm



Narrow recessed wall light
GR-BD-L-01/ 3W 110-240VAC
L185*W40*H45mm, cutout: 170*w35mm



IP65 Rectangle recessed wall light
GR-BD-L-04/ 7W/9W/12W/15W options
L160*W100*H60mm, cutout:155*w95mm



IP65 Square recessed wall light
GR-BD-L-05 / 9W-12W 15W 18W options
L160*W160*H65mm, cutout:155*155mm



Round recessed wall light ip65
GR-BD-L-06/ 3W
D82*82*45MM, Cutout:78mm



■ Spike/Ground Spotlight

- Beam angle: 30°; IP66.100-240VAC 50/60Hz.
- Aluminum body+toughed glass cover, adjustable bracket.



Order Model	GR-SP-3WB	GR-SP-5WB	GR-SP-7WB	GR-SP-10WB	GR-SP-15WB
Wattage	3W	5W	7W	10W	15W
Size(mm)	φ42*L80mm	φ50*L90mm	φ58*L120mm	φ61*L140mm	φ75*L160mm



■ Top outdoor Spotlight

- Beam angle: 30°; IP66. adjustable body.100-240VAC 50/60Hz.
- Source: Bridgelux chips,CRI80; 100lm/W. Ground/Spike installation optional



Order Model	GR-SP-10WH	GR-SP-20WH	GR-SP-30WH
Wattage	10W	20W	30W
Size(mm)	φ80*L130	φ80*L130	φ108*L170




■ Economy Tree Spotlight

- Beam angle: 30°; IP66, Spike/ground installation optional
- Source: Bridgelux chips,CRI80; 100lm/W.100-165VAC 50/60Hz.



Order Model	GR-SP-5WA	GR-SP-6WA	GR-SP-9WA	GR-SP-12WA	GR-SP-18WA	GR-SP-24WA	GR-SP-36WA
Wattage	5W	6W	9W	12W	18W	24W	36W
Size(mm)	φ95	φ125	φ155	φ155	φ185	φ205	φ235

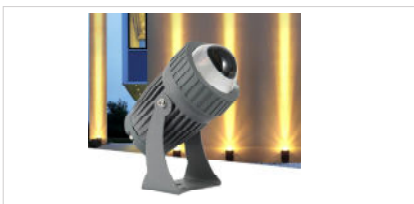

Narrow beam Outdoor spotlights
GR-SP-10WM (5-10°, IP66,220VAC)



GU10 LED Spike light
GR-SP-GU10 IP65 220VAC



Square spotlights, ip66
GR-SP-K / 9W 18W -72W Options



■ DC24V Inground Light

- input voltage: DC24V or 12V; IP66. Lifetime:50000Hrs
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-1WB42	GR-GL-1WB52	GR-GL-1W-62B	GR-GL-3WB
Wattage	1W	1W	1W	3W
Outcut(mm)	φ38*H85	φ48*H95	φ58*H105	φ70*H105

■ Side-lighting Inground light

- input voltage:AC/ DC24V or 12V.IP66
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-1WA42	GR-GL-1WA52	GR-GL-1WA62	GR-GL-1WA75
Wattage	1W	1W	2W	3W
Outcut(mm)	φ38*H85	φ48*H90	φ58*H100	φ68*H105

■ Project led Inground Light

- input voltage:110-240VAC 50/60Hz.IP66. 30°
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-1WA	GR-GL-3WA	GR-GL-6WA	GR-GL-9WA	GR-GL-18WA	GR-GL-24WA	GR-GL-36WA
Wattage	1W	3W	6W	9W/12W	18W	24W	36W
Outcut(mm)	φ38*H65	φ95*H90	φ115*H95	φ140*H105	φ195*H105	φ195*H105	φ200*H105

■ Square LED Inground Light


- input voltage:110-240VAC 50/60Hz.IP66. 30°
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-4WF	GR-GL-5WF	GR-GL-6WF	GR-GL-9WF	GR-GL-12WF	GR-GL-16WF	GR-GL-24WF
Wattage	4W	5W	6W	9W	12W	16W	24W
Outcut(mm)	90*90	115*115	130*130	140*140	150*150	190*190	240*240

■ Linear LED Inground light

- input voltage:110-240VAC 50/60Hz. IP66,30°
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional



Order Model	GR-GL-5WL	GR-GL-6WL	GR-GL-9WL	GR-GL-12WL	GR-GL-18WL	GR-GL-24WL	GR-GL-36WL
Wattage	3/5W	6W	9W	12W	18W	24W	36W
Outcut(mm)	L190*W80	L290*W85	L290*W85	L590*W85	L590*W85	L990*W85	L990*W85



■ Swimming Pool Light

- Input voltage: AC/DC24V or 12V; IP68
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional

Order Model	GR-UL-9WE	GR-UL-12WE	GR-UL-18WE
Wattage	9W	12W	18W
Diameter(mm)	φ230	φ230	φ295



■ Ground Underwater Led Light

- Input voltage: AC/DC24V or 12V; IP68
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional

Order Model	GR-UL-6WA	GR-UL-9WA	GR-UL-12WA	GR-GL-18WA	GR-GL-24WA
Wattage	6W	9W	12W	18W	24W
Diameter(mm)	φ120*H140	φ145*H180	φ145*H180	φ175*H210	φ210*H230



■ Embaded Underwater Light

- Input voltage: AC/DC24V or 12V; IP68
- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional

Order Model	GR-UL-6WB	GR-UL-9WB	GR-UL-12WB	GR-GL-18WB	GR-GL-24WB
Wattage	6W	9W	12W	18W	24W
Outcut(mm)	φ115*H95	φ145*H115	φ155*H100	φ195*H115	φ195*H115



■ DC24V/12V Linear Wall Washer Light

- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional
- Aluminum body+toughed glass, IP67. Isolated driver, 2/3years warranty

Order Model	GR-WW-18WB	GR-WW-24WB	GR-WW-36WB
Wattage	18W	24W	36W
Length(mm)	φ38*H85	φ48*H95	φ58*H105



■ 110/220VAC Linear Wall washer light

- Source: Epistar LED, 3000K-6500K/ Green/ Blue/ Red optional
- Aluminum body+toughed glass, IP67. Isolated driver, 2/3years warranty

Order Model	GR-WW-9WA	GR-WW-18WA	GR-WW-24WA	GR-WW-36WA	GR-WW-48WA
Wattage	9WW	18W	24W	36W	3W
Length(mm)	500	1000	1000	1000	1000



■ Classic Garden Pole light

- Including Type Y, Type 7, D60mm and D75mm installation diameter options. 90° beam angle
- Aluminum body+PC cover, IP65. 110-265VAC 50/60Hz. 110-140lm/W.

Order Model	GR-TY-30W	GR-TY-50W	GR-TY-70W	GR-TY-100W	GR-TY-150W
Wattage	30W	50W	70W	100W	150W
Size(mm)	Ø380*H563mm	Ø380*H563mm	Ø380*H563mm	Ø380*H563mm	Ø380*H563mm



■ Top Garden Pole Light

- Including Type Y, Type 7, D75mm installation diameter.60°, 90°, 120°, T2M, T3M, 75°x160°beam angle options
- Aluminum body+toughed glass, IP65. 110-265VAC 50/60Hz. 110-140lm/W.

Order Model	GR-SL-30WH-1	GR-SL-50WH-1	GR-SL-70WH-1	GR-SL-100WH-1	GR-SL-150WH-1
Wattage	30W	50W	70W	100W	150W
Length(mm)	Ø423*H520mm	Ø423*H520mm	Ø423*H520mm	Ø423*H520mm	Ø423*H520mm



Type 7



■ GR-BL-A Series

100-240VAC 50/60Hz. IP65 3Years warranty

Model	Wattage	Size(mm)
GR-BL-600A	7W	Ø108*H600
GR-BL-800A	7W	Ø108*H800
GR-BL-1000A	7W	Ø108*H1000



■ GR-BL-E Series

100-240VAC 50/60Hz. IP65 3Years warranty

Model	Wattage	Size(mm)
GR-BL-300B	7W	L160*H300
GR-BL-600B	7W	L160*H600
GR-BL-800B	7W	L160*H800



■ GR-BL-B Series

100-240VAC 50/60Hz. IP65 3Years warranty

Model	Wattage	Size(mm)
GR-BL-300B	7W	Ø120*H300
GR-BL-600B	9W	Ø120*H600
GR-BL-800B	9W	Ø120*H800



■ GR-BL-D Series

100-240VAC 50/60Hz. IP65 3Years warranty

Model	Wattage	Size(mm)
GR-BL-600D	9W	Ø120*H600
GR-BL-800D	9W	Ø120*H800
GR-BL-1000D	9W	Ø120*H1000



■ GR-BL-F Series

100-240VAC 50/60Hz. IP65 3/5Years warranty

Model	Wattage	Size(mm)
GR-BL-300F	7W	Ø150*H300
GR-BL-600F	9W	Ø150*H600
GR-BL-800F	9W	Ø150*H800



■ GR-TY-M Series






E27 Type as standard.
Aluminum / plastic body options. IP65

Model	Dimension(mm)	Wattage
GR-BL-7WM	LW210*H250	5W/7W
GR-BL-12WM	LW260*H310	9W/12W



Light up your places



 Add: 6 Floor, No 37th, Block 9, Fu'Ding Street, Tiebian Village, Henglan Town, Zhongshan, China
 +86 13570825764
 info@grnled.com / grnled01@gmail.com
 +86 13570825764 (whatsapp/ wechat ID)
 <https://grnled.com>