



## HIGH END RECESSED DOWNLIGHT

Ref No: GR-DL-35WB-9



LED Downlight adopt deep anti-glare design, low glare value performance, and consists of Osram/Bridgelux COB chips, delivers a superior LED alternative that's up to 60% more energy efficient than the conventional downlight retrofits. There are different reflectors, with 15/24/36/60° beam angle. Different reflector colors are optional, and dimmable, emergency kits are optional. It is also ideal for all commercial lighting applications.

### Complete Product Data

Order Number	GR-DL-35WB-9
Total Wattage	35W±5%
Mounting Type	Recessed mounted
Dimension(mm)	Ø162*H80mm
Outcut(mm)	Ø150mm
IP Grade	IP44
Luminaries Lumens	3350-3600lm
Beam angle	60° as standard, 15/24/36° options
Working temperature	-25°C ~ +55°C
Certificates standard	CE LVD EMC RoHS
Warranty	3/5Years
UGR	<15

### Control Gear/Driver Data

LED driver brand	LiFud/Eagleries/Philips driver brand opti
Input voltage	110/220-240VAC 50/60Hz
Output voltage	30-42Vdc
Output current	850-900mA
Power Factor	>0.9
Surge protection	1KV
Efficiency	>88% @230V
IP Grade	IP22
THD	<10% @230V
Dimmable	No, but available to select it as Triac/0-10V/DALI if needed
Free flicker	Yes
Protection	Open Circuit Protection / short Circuit protection/
Certificates	CCC、RCM、CE、CB
Warranty	3/5Years

## Material&Housing Data

Housing Color	White finished as standard
Housing Material	Aluminum
Cover	PMMA cover
Reflector material	PMMA
Fixation material	Steel
Connector	Quickly connectors

## Photometric Data


LED chip brand	Bridgelux / Osram/ CITIZEN
Chip type	COB
Color temperature	2700-2800K/3000-3200K/4000-4500K/ 5700-6000K/ 6000-6500K
CRI	>Ra90 ( 97 Max)
Life time	>50000Hrs
Lumens	120-150lm/W
SDCM	<5 or <3
Lumens maintenance	99.9%@1000hrs/ 99%@3000hrs /98%@10000hrs. (LM80)

## Optional

Dimming Type	Triac dim/ 0-10V dim/ DALI dimmable optional
Dimming driver brand	KOPU <small>EAGLE RISE</small> OSRAM <small>EUCHIP</small> LIFUD
Emergency backup	Battery backup with 3Hours for 2-3Watt
Reflector color	Shining silver as standard, White/black options



## Dimension & Install

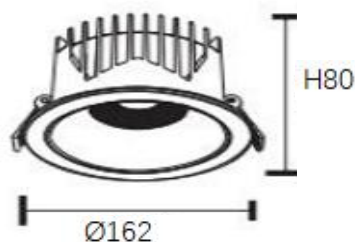

Unit:mm

## Lighting Distribution

