




## Description

This recessed spotlight is adjustable 90° up and down and has a 350° swivel design. The direction of illumination can be easily changed. The finished color includes matte white and matte black. Widely used for office lighting, museum lighting, hotel lighting, and living room lighting, etc.

## Specification


|                  |                              |
|------------------|------------------------------|
| Ref Number       | GR-DL-10WG-7                 |
| Power            | 10Watt ±5%                   |
| Lumens           | 900-1000lm                   |
| LED Type         | COB                          |
| CCT              | 2700k-3000K/4000K/5700-6000K |
| CRI              | >92                          |
| SDCM             | < 3                          |
| LED driver       | External driver included     |
| Control Way      | ON/OFF                       |
| Input voltage    | 110/ 220-240VAC 50/60Hz      |
| Efficiency       | >81%                         |
| Power factor     | >0.5                         |
| THD              | <15%                         |
| Free flicker     | Yes                          |
| Beam angle       | 15/24/36° options            |
| Materials        | Die-cast aluminum.+Lens      |
| Finished         | Matt White / Black options   |
| UGR              | <19 anti-glare               |
| Surge protection | 1KV                          |
| Insulation class | Class II                     |
| IP Rating        | IP20 (IP44 for front)        |
| Dimension        | Body:Ø50*L100mm;             |
| Cutout           | Ø75mm                        |
| Working temp     | -25°C ~ +55°C                |
| Storage temp     | -30°C ~ +60°C                |
| Standard         | CE LVD EMC RoHS              |
| Working life     | >50000Hrs                    |
| Warranty         | 3Years/5Years                |

## Dimension drawing

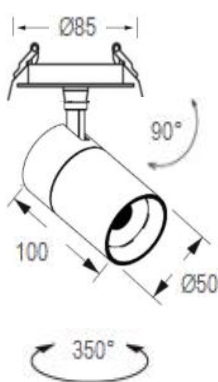

Unit: mm

## Lighting Distribution

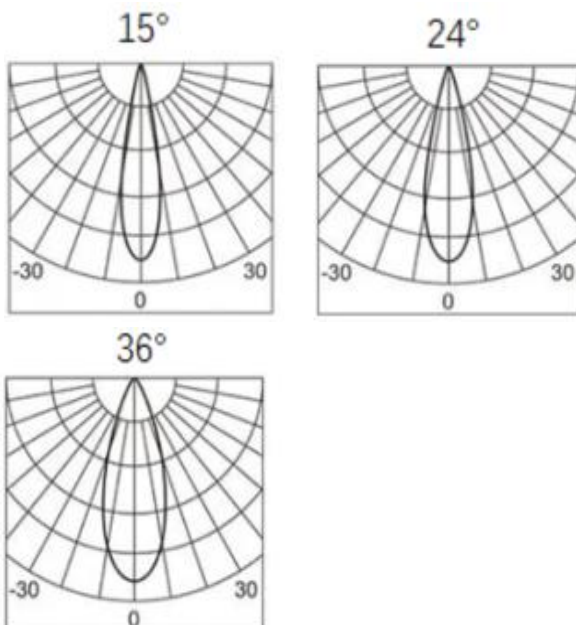

## Options(Additional cost)

- DC12V/24V/36V/48V/60V input
- Triac/0-10V/DALI dimmable
- SDCM<2
- PF>0.9
- Emergency backup

## Package

QTY: \_\_\_\_\_ CTN Size: \_\_\_\_\_  
 Gross Weight(KG): \_\_\_\_\_