




Description

This recessed spotlight is adjustable 90° up and down and has a 350° swivel design. The direction of illumination can be easily changed. The finished color includes matte white and matte black. Widely used for office lighting, museum lighting, hotel lighting, and living room lighting, etc.

Specification


Ref Number	GR-DL-15WG-7
Power	15Watt ±5%
Lumens	1300-1500lm
LED Type	COB
CCT	2700k-3000K/4000K/5700-6000K
CRI	>92
SDCM	< 3
LED driver	External driver included
Control Way	ON/OFF
Input voltage	110/ 220-240VAC 50/60Hz
Efficiency	>84%
Power factor	>0.5
THD	<15%
Free flicker	Yes
Beam angle	15/24/36° options
Materials	Die-cast aluminum.+Lens
Finished	Matt White / Black options
UGR	<19 anti-glare
Surge protection	1KV
Insulation class	Class II
IP Rating	IP20 (IP44 for front)
Dimension	Body:Ø60*L130mm;
Cutout	Ø75mm
Working temp	-25°C ~ +55°C
Storage temp	-30°C ~ +60°C
Standard	CE LVD EMC RoHS
Working life	>50000Hrs
Warranty	3Years/5Years

Dimension drawing

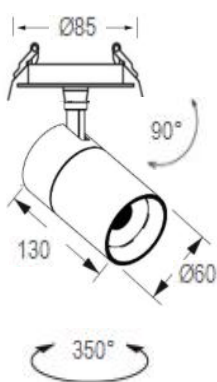

Unit: mm

Lighting Distribution

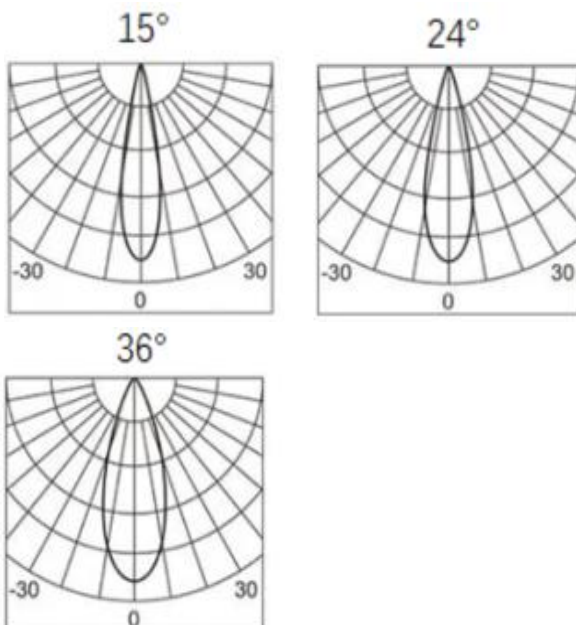

Options(Additional cost)

- DC12V/24V/36V/48V/60V input
- Triac/0-10V/DALI dimmable
- SDCM<2
- PF>0.9
- Emergency backup

Package

QTY: _____ CTN Size: _____
 Gross Weight(KG): _____