





•Dimension drawing

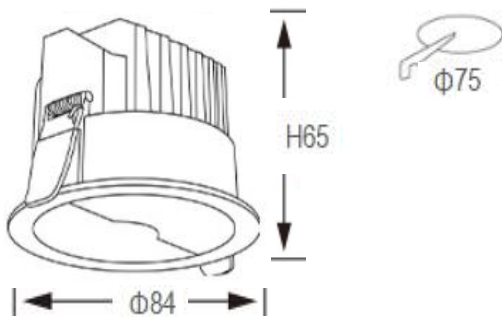

Unit:mm

•Lighting Distribution

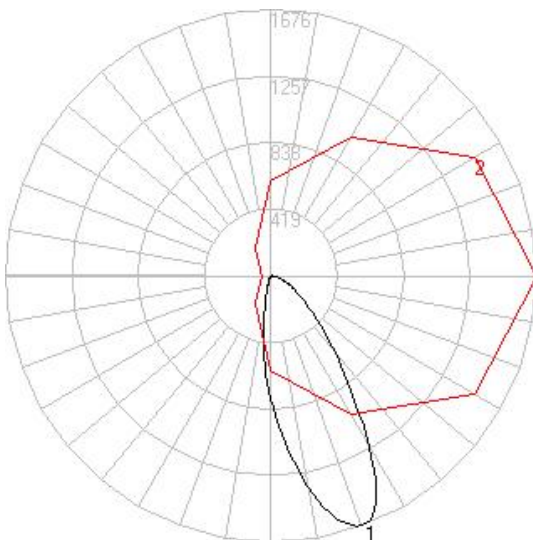

•Description

Our asymmetric Beam LED wall washer downlight is a popular recessed indoor lighting solution. With a tiltable beam design and excellent anti-glare effect, it provides ideal directional lighting for walls. Its high performance makes it a great choice for hotel lobbies, exhibition halls, corridors, and other indoor areas.

•Specification

Ref Number	GR-DL-75E(12W)
Power	12Watt ±5%
Lumens	1000-1200lm
LED Type	COB
CCT	2700k-3000K/4000K/5700-6000K
CRI	>92
SDCM	< 3
LED driver	External included
Control Way	ON/OFF
Input voltage	110/ 220-240VAC 50/60Hz
Efficiency	>86%
Power factor	>0.5
THD	<15%
Free flicker	Yes
Beam angle	15/24/36/50°
Materials	Die-cast aluminum,White / Black finished
Reflectors	Shining silver/gun black reflector options
UGR	<15 anti glare
Surge protection	1KV
Mounting	Recessed
IP Rating	IP20 (IP44 for front)
Dimension	Φ84*H65mm
Cutout	Φ75mm
Working temp	-25°C ~ +50°C
Storage temp	-30°C ~ +55°C
Standard	CE LVD EMC RoHS
Working life	>50000Hrs
Warranty	3Years/5Years
Insulation class	Class II

•Options(Additional Cost)

- DC12V/24V/36V/48V/60V input
- Triac/0-10V/DALI dimmable
- SDCM:2
- PF>0.9
- Emergency backup

•Package

QTY:50PCS/CTNS CTN Size: 53*22*54CM
Gross Weight(KG): 14KG/CTNS