




Description

This recessed trimless spotlight is designed to be stretchable, adjustable & gimbal, up down 90° adjustable direction, and 360° rotation. It is flexible to be used for luxury commercial lighting for hotels, supermarkets, shopping malls, offices, etc.


Specification

| | |
|------------------|------------------------------|
| Ref Number | GR-DLG-25WR-1 |
| Power | 25Watt ±5% |
| Lumens | 2350-2500lm |
| LED Type | COB |
| CCT | 2700k-3000K/4000K/5700-6000K |
| CRI | >90 |
| SDCM | <5 or 3 |
| LED driver | External driver included |
| Control Way | ON/OFF |
| Input voltage | 110/ 220-240VAC 50/60Hz |
| Efficiency | >89% |
| Power factor | >0.5 |
| THD | <15% |
| Free flicker | Yes |
| Beam angle | 15/24/36°/55° options |
| Materials | Die-cast aluminum. |
| Finished | Matt White / Black options |
| UGR | <19 anti-glare |
| Surge protection | 1KV |
| Mounting | Trimless recessed |
| IP Rating | IP20 (IP44 for front) |
| Dimension | Ø95*H145mm |
| Cutout | Ø95mm |
| Working temp | -25°C ~ +50°C |
| Storage temp | -30°C ~ +55°C |
| Standard | CE LVD EMC RoHS |
| Working life | >50000Hrs |
| Warranty | 2/3Years/5Years |
| Insulation class | Class II |

Dimension drawing

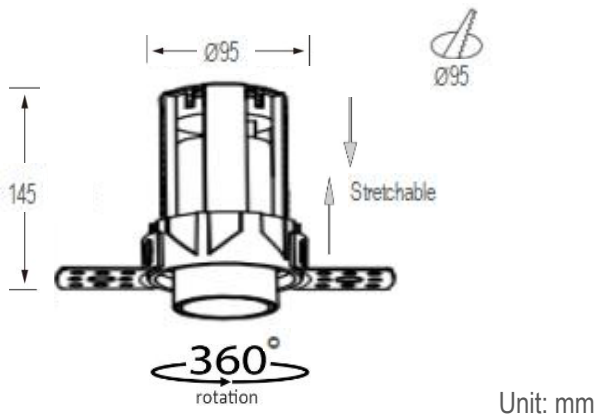

Lighting Distribution

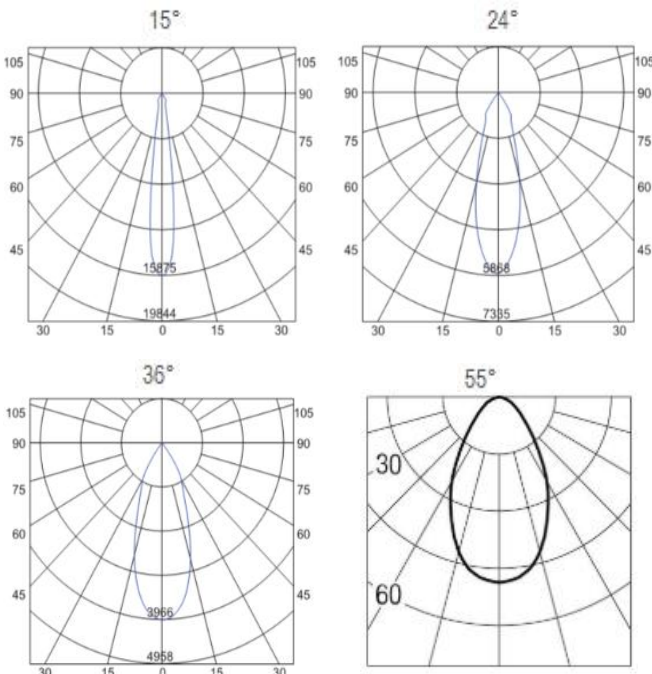

Options

- DC12V/24V/36V/48V/60V input
- Triac/0-10V/DALI dimmable
- SDCM<3;

Package

QTY: CTN Size:
Gross Weight(KG):