




## Description

This recessed spotlight is designed to be stretchable, adjustable & gimbal, up down 90° adjustable direction, and 360° rotation. It is flexible to be used for luxury commercial lighting for hotels, supermarkets, shopping malls, offices, etc.


## Specification

Ref Number	GR-DLG-2*15WR
Power	2*15Watt ±5%
Lumens	2730-3000lm
LED Type	COB
CCT	2700k-3000K/4000K/5700-6000K
CRI	>92
SDCM	< 3
LED driver	External driver included
Control Way	ON/OFF
Input voltage	110/ 220-240VAC 50/60Hz
Efficiency	>87%
Power factor	>0.5 or 0.9
THD	<15%
Free flicker	Yes
Beam angle	15/24/36°/55° options
Materials	Die-cast aluminum.
Finished	Matt White / Black options
UGR	<19 anti-glare
Surge protection	1KV
Mounting	Recessed
IP Rating	IP20 (IP44 for front)
Dimension	W86*L176*H122mm
Cutout	L165*W75mm
Working temp	-25°C ~ +50°C
Storage temp	-30°C ~ +55°C
Standard	CE LVD EMC RoHS
Working life	>50000Hrs
Warranty	2/3Years/5Years
Insulation class	Class II

## Dimension drawing

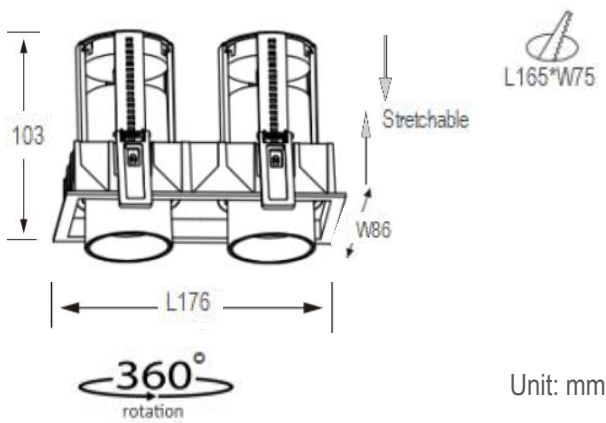

## Lighting Distribution

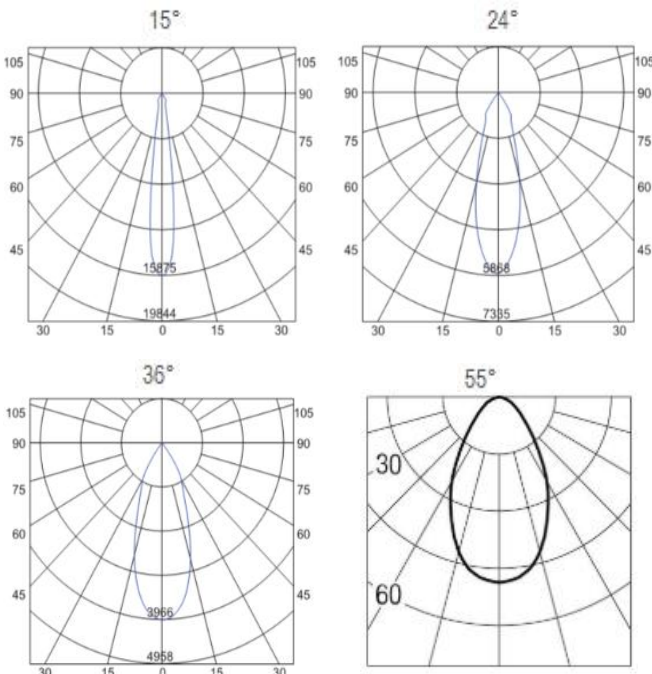

## Options

- DC12V/24V/36V/48V/60V input
- Triac/0-10V/DALI dimmable
- SDCM:2
- Emergency backup (1-3hours with 3-5W )
- Plug

## Package

QTY: CTN Size:  
Gross Weight(KG):