# 200W UFO LED High Bay

## Dimension drawing

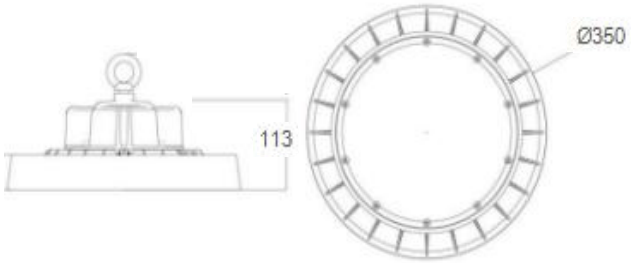


Unit: mm

## Lighting Distribution

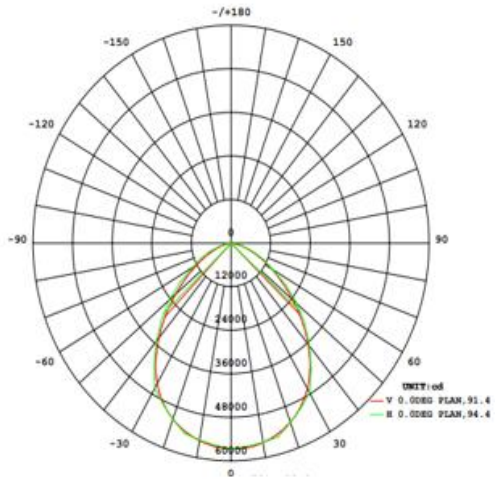


## Description

UFO high-bay LED lights deliver high-efficiency, long-lasting illumination tailored for industrial and commercial high-ceiling spaces. Designed as a reliable replacement for traditional metal halide and fluorescent lamps, these LED UFO high bay lights feature high lumen output, low energy consumption, and durable IP65 waterproof housing, perfectly suited for warehouses, factories, gymnasiums, and retail warehouses

## Specification

| | |
|---|---|
| Ref Number | GR-HB-200WB |
| Power | 200Watt ±5% |
| Lumens | 28000-32000lm |
| LED Type | SMD3030 |
| CCT | 2700k-3000K/4000K/5700-6000K |
| CRI | >70 or 80 |
| SDCM | < 3 |
| LED driver | included |
| Control Way | ON/OFF |
| Input voltage | 110-265VAC 50/60Hz |
| Efficiency | >90% |
| Power factor | >0.95 |
| THD | <15% |
| Free ficker | Yes |
| Beam angle | 60/90/120° options |
| Materials | Die-cast aluminum+PC lens |
| Finished | Black |
| Cover | PC lens |
| Surge protection | 4/6KV |
| Mounting | Pendant |
| IP Rating | IP65 |
| Dimension | Ø350*H113mm |
| Insulation class | Class I |
| Working temp | -25℃ ~ +55℃ |
| Storage temp | -30℃ ~ +60℃ |
| Standard | CE LVD EMC RoHS |
| Working life | >50000Hrs |
| Warranty | 3Years/5Years |

## Options(Additional cost)

1. DC12V/24V/36V/48V/60V input
2. Triac/0-10V/DALI dimmable
3. Bracket for surface mounted
4. Alumiunum cover
5. Emergency backup (3W-5W with 1-3hrs)

## Package

Package: 1PCS/CTNS/3KG

CTN Size: 36*36*15CM