





•Dimension drawing

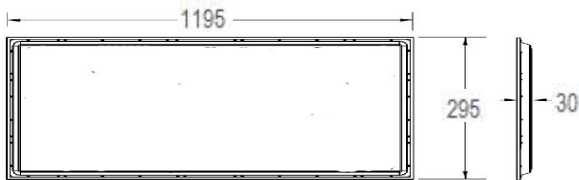

Unit:mm

•Lighting Distribution

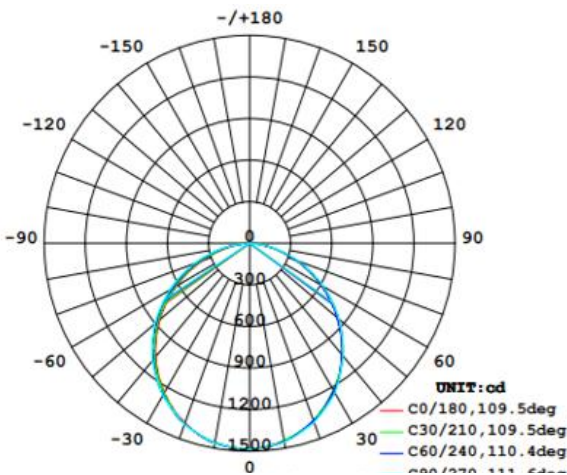

•Description

This is Back-lit LED panel with an integrated waterproof structure, the protection grade can be IP65 waterproof. LED module with lens for high lumen output, without any LGP, to avoid any yellow changes. Includes LED driver. What's more, the different installations- recessed, surface, suspension are optional. It is the perfect choice for commercial lighting projects.

•Specification

Ref Number	GR-PL12030-40WB
Power	40Watt ±5%
Lumens	3800-4400lm
LED Type	SMD2835
CCT	2700k-3000K/4000K/5700-6000K
CRI	>80
SDCM	< 3
LED driver	IP20 External driver included
Control Way	ON/OFF
Input voltage	110/ 220-240VAC 50/60Hz
Efficiency	>88%
Power factor	>0.9
THD	<15%
Free flicker	Yes
Beam angle	120°
Materials	Metal body+ PC cover
Finished	White
UGR	<21
Surge protection	1KV
Mounting	Rcessed
IP Rating	IP65
Dimension	1195x295xH30mm
Insulation class	Class II
Working temp	-25°C ~ +50°C
Storage temp	-30°C ~ +55°C
Standard	CE LVD EMC RoHS
Working life	>50000Hrs
Warranty	3Years/5Years

•Options(Additional Cost)

- IP65 waterproof LED Driver
- Triac/0-10V/DALI dimmable
- SDCM:2
- Emergency Battery kit
- Clips / Suspension ropes /surface frame for different install way.

•Package

QTY:8PCS/CTNS CTN Size: 129*36*39CM
 Gross Weight(KG): 27KG/CTNS for IP65 waterproof driver