




Description

The recessed mini downlight is mini size, with an adjustable design. Commonly used in kitchen downlights under cabinets, wine cabinets, jewelry display cabinets, hotels, bedrooms, living rooms, offices, and other small spaces for discreet lighting.

Specification


Ref Number	GR-DL-3WMID
Power	3Watt ±5%
Lumens	240-300lm
LED Type	COB
CCT	2700k-3000K/4000K/5700-6000K
CRI	>92
SDCM	< 3
LED driver	External driver included
Control Way	ON/OFF
Input voltage	110/ 220-240VAC 50/60Hz
Efficiency	>75%
Power factor	>0.5
THD	<20%
Free flicker	Yes
Beam angle	24°
Materials	Die-cast aluminum
Finished	White OR Black options
UGR	<19 anti glare
Insulation class	Class II
Mounting	Recessed
IP Rating	IP20 (IP44 for front)
Dimension	Ø45*H52mm
Cutout	Ø40mm
Working temp	-25°C ~ +55°C
Storage temp	-30°C ~ +60°C
Standard	CE LVD EMC RoHS
Working life	>50000Hrs
Warranty	2/3Years

Dimension drawing

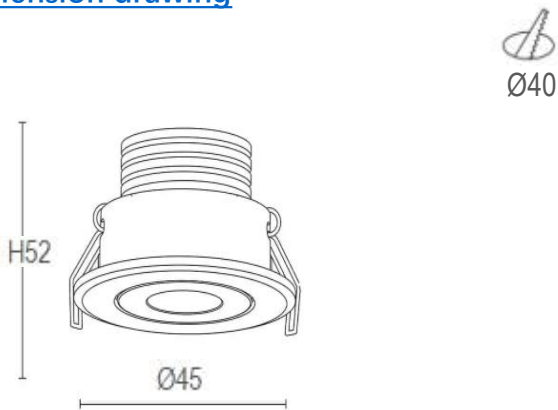

Unit: mm

Lighting Distribution

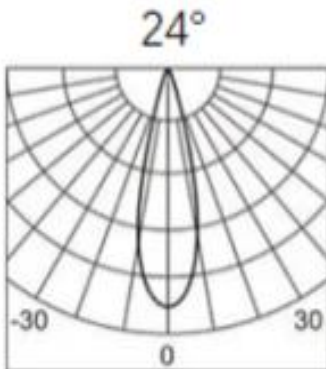

Options(Additional Cost)

- DC12V/24V/36V/48V/60V input
- Triac/0-10V/DALI dimmable
- SDCM:2

Package

QTY: CTN Size:

Gross Weight(KG):